


Wilo SD, FD, TDV

Suction Diffusers & Triple Duty Valves

Product Brochure

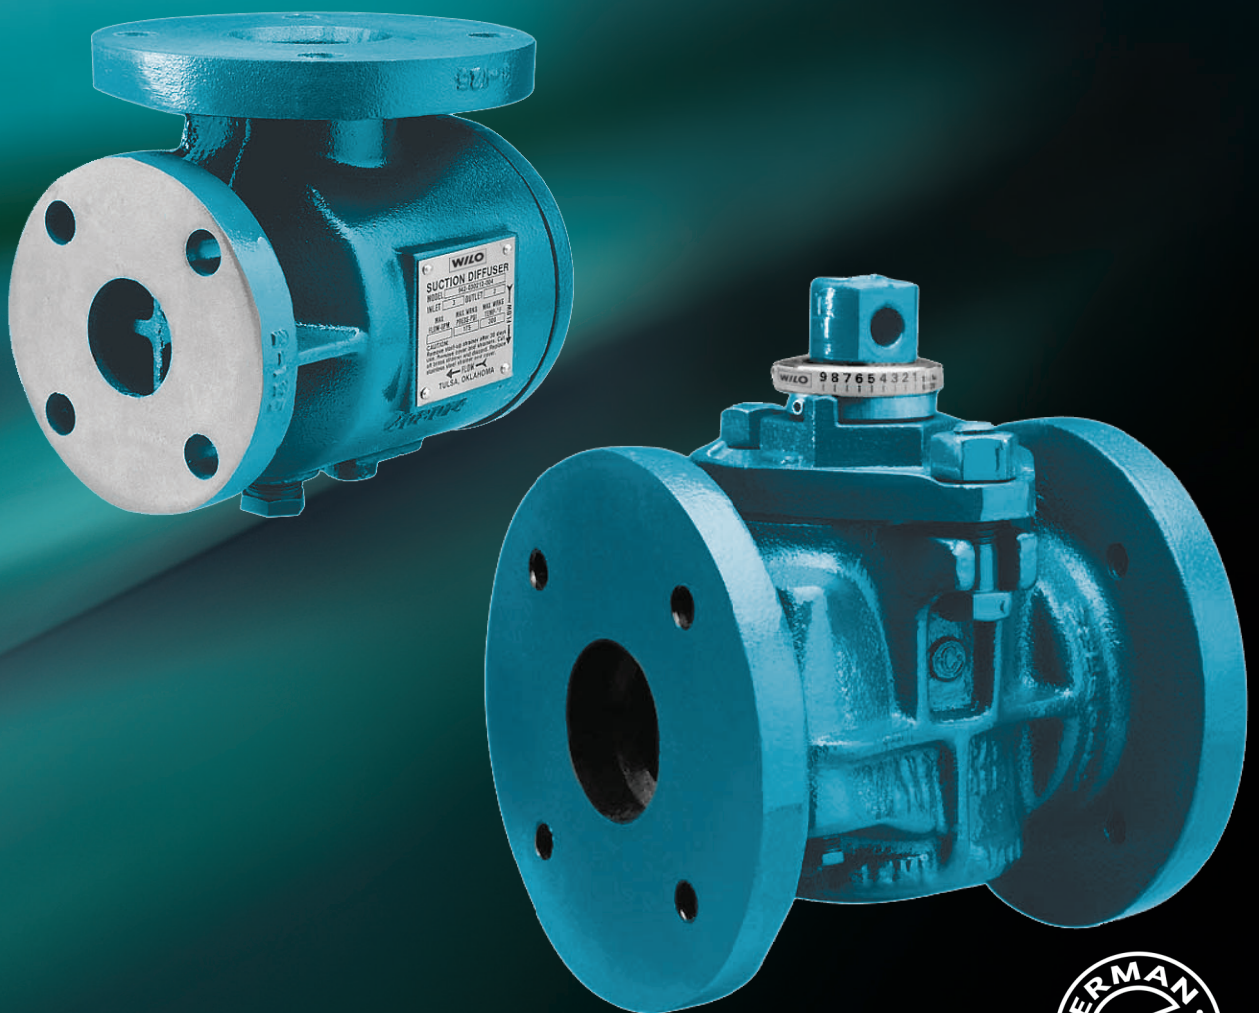

Wilo SD, FD,TDV


Suction Diffusers & Triple Duty Valves

Wilo SD, FD, TDV


Suction Diffusers (SD,FD)




- » Available in 2"x 1½" through 12"x 12"
- » Integrally cast stabilizing vanes
- » Separate fine mesh screen surrounds each perforated screen
- » Cast on pads for convenient mounting of standard I.D. support foot
- » Class 125 (175 PSI)
- » Efficient design results in no need for a 90° elbow, strainer or stabilizing piping

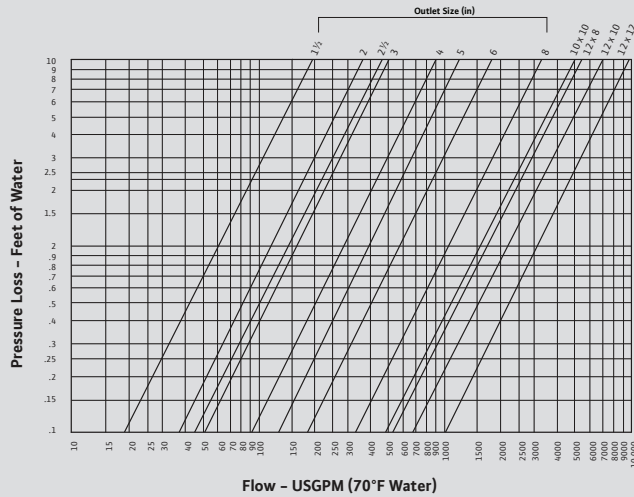

Triple Duty Valves (TDV)



- » Available in 1½" through 12" pipe size
- » Schrader valve metering connections
- » Memory stop which avoids the need for resetting after shut-down
- » Plug position indicator and calibrated scale for system balancing and flow regulation
- » Spring loaded clapper allows the valve to be installed horizontally 1½" through 8" vertically
- » Dual O-ring stem seals
- » Non-Lubricated operation
- » Bubble-tight shut-off
- » In-line serviceability

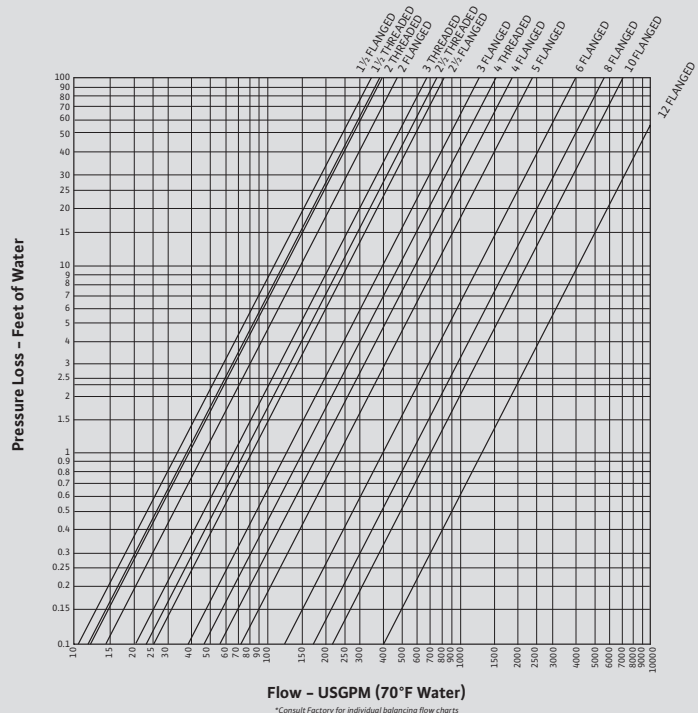

WILO USA LLC

Toll-Free: 888-945-6872
 Web: www.wilo-usa.com
 Email: info@wilo-usa.com

WILO Canada Inc.

Toll-Free: 866-945-6236
 Web: www.wilo-canada.com
 Email: info@wilo-canada.com

