



Models VSI/IVSI

Positive Pressure Venting Systems

Available in 1" Airspace &
1", 2", or 4"
Ceramic Insulation



Ideal for discharging exhaust gases and fumes from boilers, heaters, ovens, engines, turbines and kitchen appliances.

UNDERWRITERS LABORATORIES LISTINGS

Model VSI and IVSI in sizes 5" through 48" diameters have been tested and Listed (Safety Certified) by Underwriters Laboratories, Inc. (ULI) and bears the UL and/or c-UL logo signifying compliance with U.S. and/or Canadian standards. UL Listing product categories include:

USA

Grease Duct (UL1978)
Building Heating Appliance Chimney (UL103)
(Industrial) 1400° F Chimney (UL103)
Type L Vent (Model IVSI only) (UL641)
Type B Gas Vent (UL441)

Canada

Grease Duct (UL1978)
540°C (1000°F) Industrial Chimney (ULC-S604)
760°C (1400°F) Industrial Chimney

UL file numbers for VSI and IVSI include
MH6673 and MH11382

CODE AND STANDARD COMPLIANCE

NFPA (NFPA 31, 37, 54, 96, 211)
ICC (IMC, IFGC)
IAMPO (UMC)

Model VSI and IVSI have been approved by the City of New York Department of Buildings, Materials and Equipment Acceptance Division under the following

MEA numbers:	<u>Model VSI</u>	<u>Model IVSI</u>
Building Heating Appliance Chimney	MEA 132-90M	MEA 135-90M
1400° F Chimney	MEA 133-90M	MEA 181-90M
Grease Duct	MEA 134-90M	MEA 134-90M

ASSOCIATION/COMMITTEE PARTICIPATION



TABLE OF CONTENTS

System Concept	1
Exceeding the Requirements	1
Guide to Component Parts	2-3
Product Identification	4
Product Listings	4
Joint Assembly Parts	5
Sealants	5
Double Wall Pipe	7
Adjustable/Variable Pipe	7
Double Wall Fittings	8-14
Support/Guide Accessories	15
Connection Accessories	16-18
Roof Penetrations	19-21
Terminations	22-24
Miscellaneous	25
Special Parts	26
Weight Information	27-29
Technical Data	30
Warranty Statements	inside back cover

AMPCO Model VSI and IVSI are modular, prefabricated piping systems which embody flanged joints designed for both quick assembly and pressure-sealing capabilities. They offer a combination of insulated piping components as well as the structural accessories needed for support and attachment to building structures. Expansion joints are available both in gasket designs and in pressure tight, all-welded bellows designs.

Standard gas-carrying piping parts are usable for a wide variety of applications:


- Chimneys and stacks for all types of building heating equipment.
- Chimneys for industrial ovens, furnaces, and processing equipment.
- Exhaust piping for engines or turbine units.
- Ducting in restaurants for compliance with Type 1 hood requirements.
- Ducting for heated air and combustion products.
- Ducting for light duty pollution control equipment.
- Venting for engine exhaust and other shipboard systems.
- Venting for offshore drilling rigs.

Complete Line of Fittings

Model VSI and IVSI are available in eighteen sizes, from 5" I.D. to 48" I.D. Fittings include various elbows, tees, supports and terminations, as well as a variety of accessory fittings designed to make installation simple and quick.

Each component is shipped complete and ready for installation. Each ordered part includes Inner Vee Bands, Outer Channel Bands and all the necessary hardware.

All items included with each order are listed in this catalog under the part description.

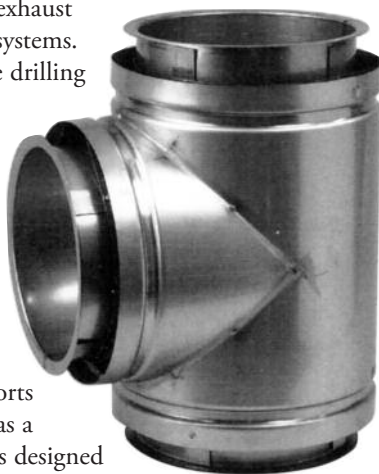


Exceeding the Requirements

AMPCO's, positive pressure system concept, far exceeds the requirements of codes and other manufacturers. Results of our testing programs illustrate this fact.

Leak Tests

AMPCO conducted system pressure testing (to 60" w.c.) against leakage in the presence of UL inspectors, and the results of these tests are impressive. Using the OSHA occupation standard-of-leakage rate of 50 parts per million over an eight hour period as criterion for acceptance, AMPCO was tested to a leakage rate of only .144 parts per million, or three-tenths of one percent (.3%) of the maximum allowable leakage rate per UL103 test standard.

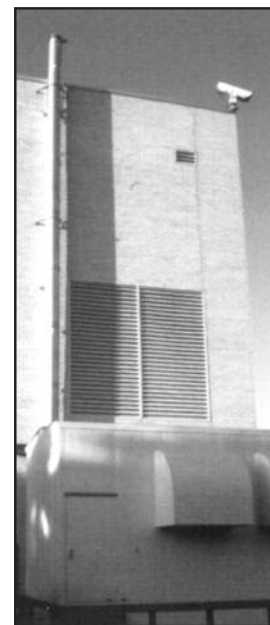

Seismic Tests

We further demonstrated the superiority of the Model VSI and IVSI concept by conducting seismic load tests. These tests proved the structural integrity of our products under severe stress by showing that a guyed stack measuring 20 inches in diameter and exceeding 10 feet above the guying location (installed in strict accordance with the UL103 Listing) could withstand the rigors of all Seismic Zones.


Structural Tests

AMPCO recently tested for greater freestanding limits (termination height above a guide point). These tests, simulating stack performance under 110 mph wind conditions, again demonstrated the superiority of AMPCO products.



Skin Temperature Rise Tests


Among other things, UL103 covers the temperature rise limits of the surrounding combustible materials in an unenclosed chimney installation and it defines the test set-up to measure the actual temperature rise of those materials at the OEM recommended clearances. Our published Model IVSI skin temperatures were obtained during these tests.

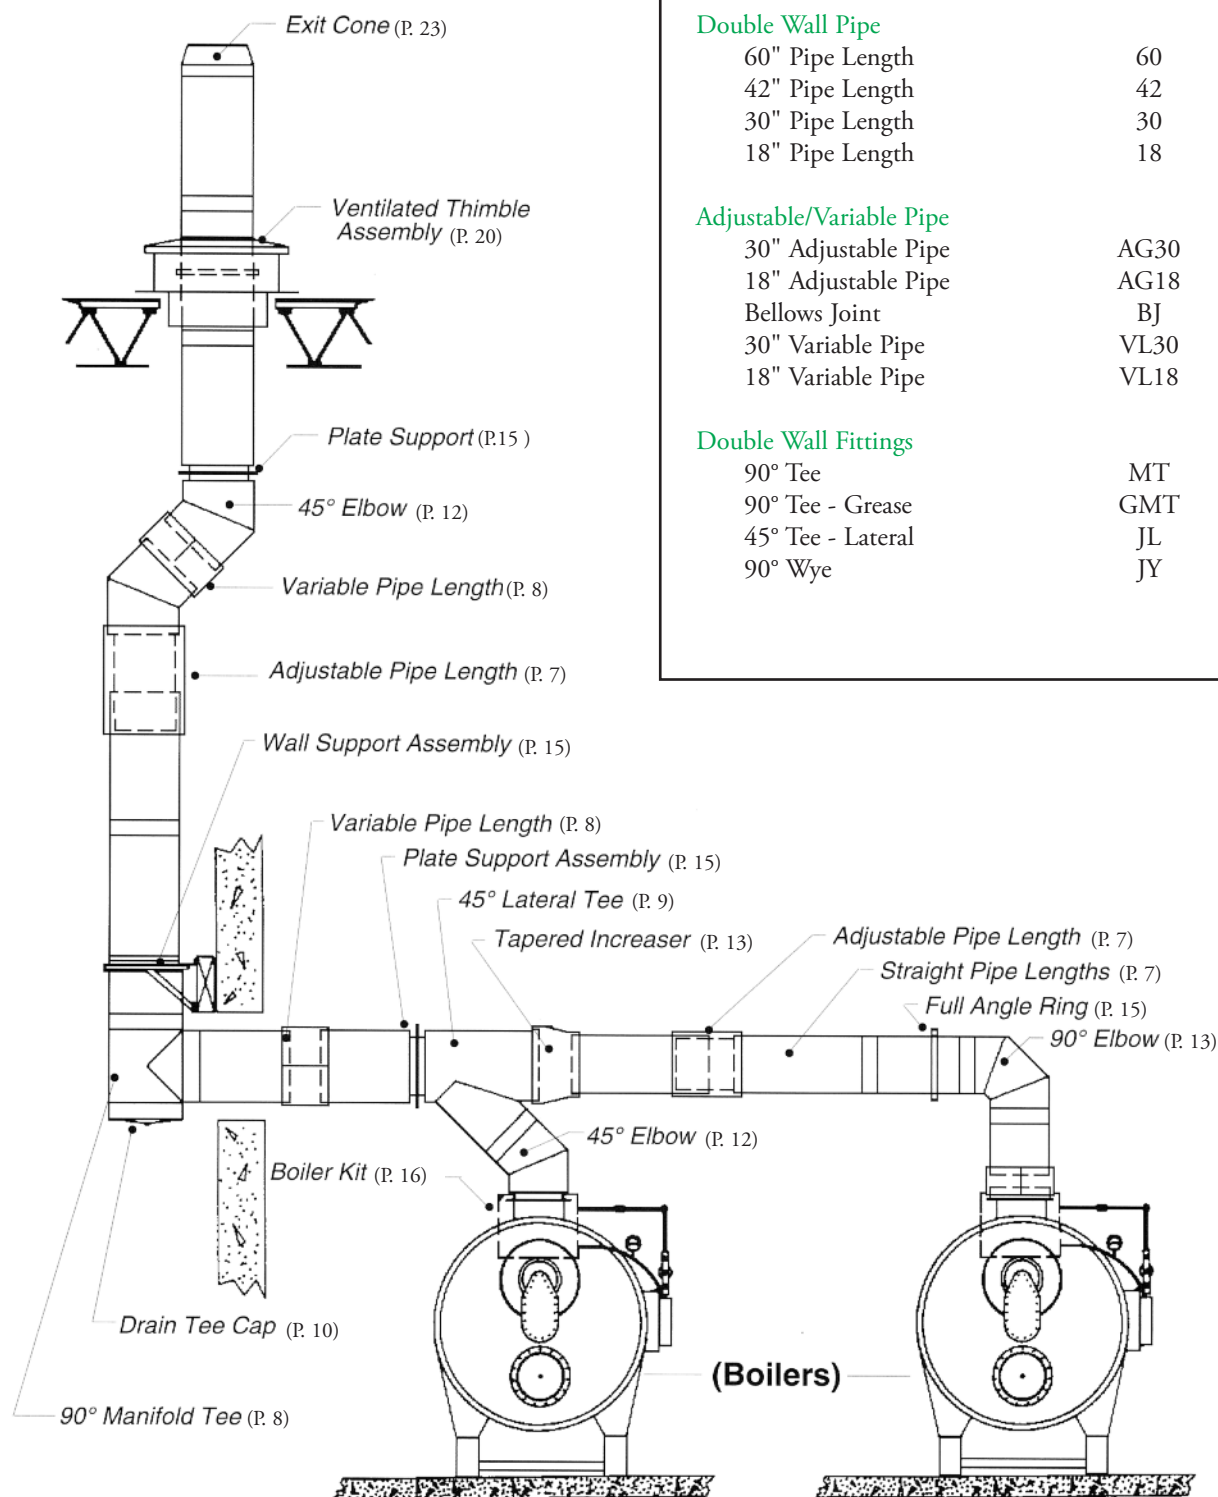

Product	Code	Page
Joint Assembly Parts		
Overlapping- Vee Band	VB	5
Channel Band	CB	5
Half Channel Band	HCB	5
Low Temperature Sealant	P600	5
High Temperature Sealant	P2000	5
Double Wall Pipe		
60" Pipe Length	60	7
42" Pipe Length	42	7
30" Pipe Length	30	7
18" Pipe Length	18	7
Adjustable/Variable Pipe		
30" Adjustable Pipe	AG30	7
18" Adjustable Pipe	AG18	7
Bellows Joint	BJ	8
30" Variable Pipe	VL30	8
18" Variable Pipe	VL18	8
Double Wall Fittings		
90° Tee	MT	8
90° Tee - Grease	GMT	9
45° Tee - Lateral	JL	9
90° Wye	JY	10

Product	Code	Page
Double Wall Fittings (cont)		
Drain Tee Cap	TC	10
Clean Out Tee Cap	TCN	10
No Tool Access Cap	NTAC	11
15° Elbow	EL15	11
30° Elbow	EL30	12
45° Elbow	EL45	12
90° Elbow	EL90	13
Tapered Increaser	OT	13
Step Increaser	OS	14
Drain Section	DS	14
Support/Guide Accessories		
Half Angle Ring	HR	15
Full Angle Ring	FR	15
Plate Support Assembly	PA	15
Wall Support Assembly	WA	15
Wall Guide Assembly	WG	16
Floor Guide Assembly	FG	16
Support Strap	SS	16
Connection Accessories		
Boiler Adapter Kit	BK	16
Seal Ring	SR	17
Flange Adapter	FD	17
Clamp Flange	CF	17
Flanged Hood Transition	TS	18
Unflanged Hood Transition	TSU	18
Fan Adapter	FA	18


Product	Code	Page
Roof Penetrations		
Storm Collar	SC	19
Tall Flashing	TF	19
Pitched Tall Flashing	PTF	19
Ventilated Thimble	THB	20
Ventilated Tall Flashing	VTF	20
Ventilated Storm Collar	VSC	20
Ventilated Thimble Assembly	MVT	20
Ventilated Support Assembly	MRS	21
Pitched Ventilated Thimble	PVT	21
Terminations		
Closure Ring	CR	22
Chimney Top	CT	22
Stack Cap	SK	23
Exit Cone	EC	23
Flip Top	FL	24
Miter Cut	MC	24
Miscellaneous		
Explosion Relief Valve	ER	25
Guy Section	GS	25
Guy Tensioner	GT	25

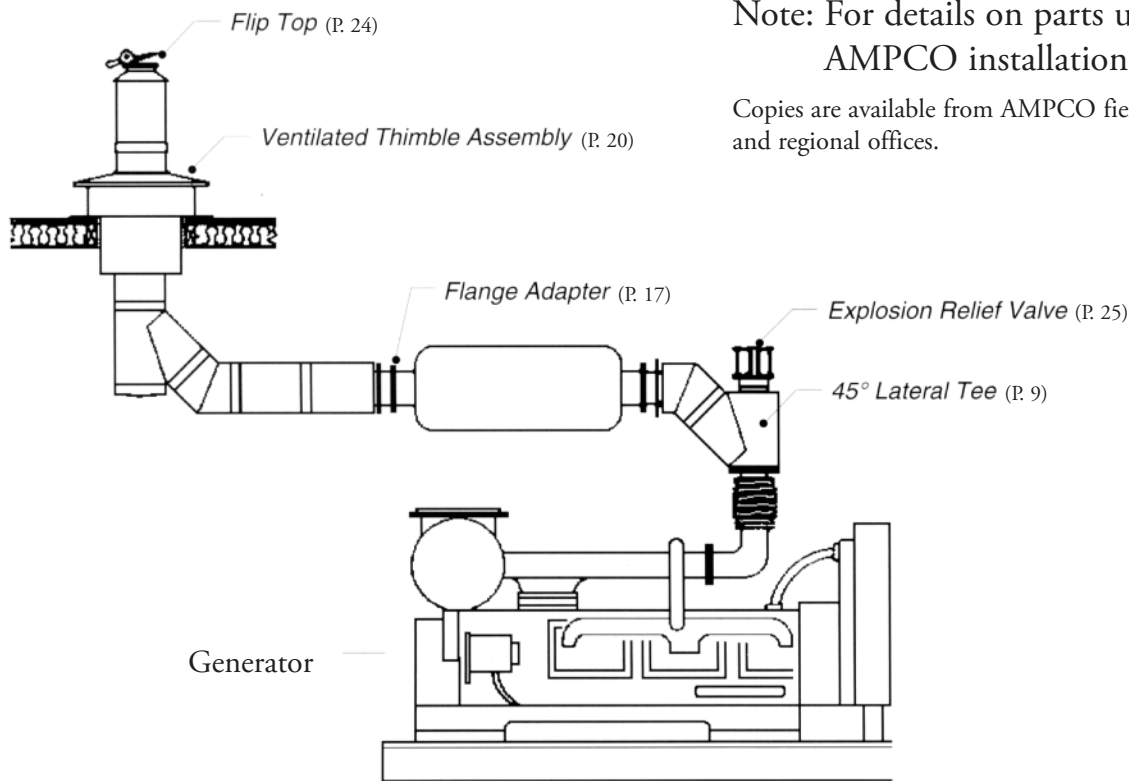

Note: For details on parts usage, refer to the AMPCO installation instructions.

Copies are available from AMPCO field service representatives and regional offices.

Model VSI vs. Model IVSI

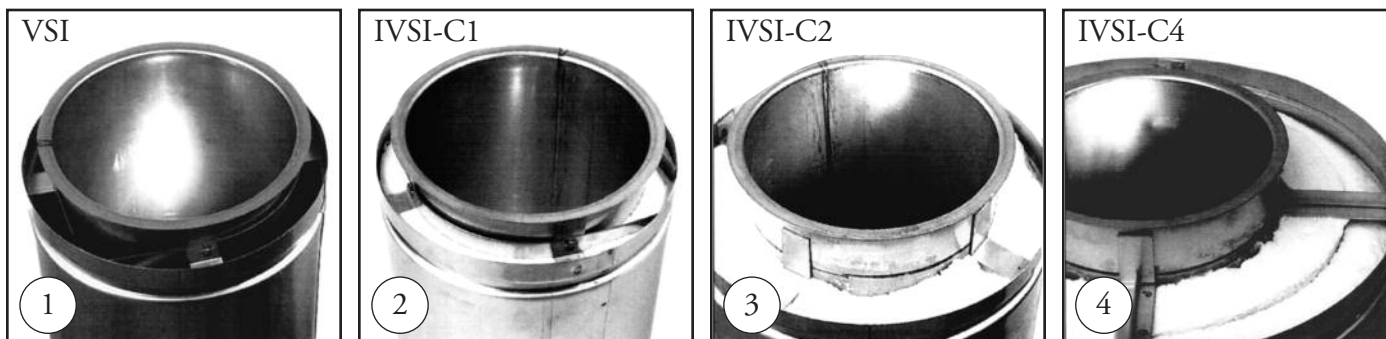

Ceramic Fiber insulation increases the diameter of the outer wall on Model IVSI-C2 and IVSI-C4 pipe and fittings. Shown in this sequence is the same 8-inch diameter inner pipe. (Photo 1) Without insulation the outside diameter of the pipe is 10-inches. (Photo 2) This is also true of the same pipe with a 1 -inch layer of insulation. (Photo 3) However, the same 8-inch pipe with 2-inch insulation results in an outside diameter of 12 inches. (Photo 4) Adding 4 inches of fiber insulation makes the diameter of the outer wall 16 inches.

Understanding Product Codes and Part Numbers

All parts manufactured by AMPCO are identified by a series of numbers and letters which describe their makeup and function.

Here is how to interpret the Part Number designation for Model VSI and IVSI products.

1. It begins with the pipe or fitting's Internal Diameter (in inches) such as 8, 22, 36, etc.
2. This is followed by the Model designation, VSI for air-insulated, or IVSI for parts that are fiber insulated.
3. Next, is the product's Material designation, such as 316 or 304/304. The first item indicates the makeup of the inner liner, while the second half indicates the material content of the outer wall, if stainless. If aluminized outer, the Part Number indicates inner material only.
4. Then, following a long dash, the product's Code name is listed, such as AG30, JY, or MVT. If the product is air insulated, the product identification ends with this Code.
5. Finally, when a product is fiber insulated, a designation is added at the end to indicate Insulation Thickness. -C1 means a thickness of 1 - inch; -C2, 2-inches; and -C4, 4-inches.

(For Product Code listings, refer to page 2.)

(For comparison, see photos above.)

Thus, the Ordered Part Number for a 30-inch Adjustable Pipe, with a 6-inch I.D., made of 304 Stainless Steel inner and Aluminized Steel outer, packed with 2-inch fiber insulation, is listed:

6IVSI304- AG30-C2

*** Note:** For products with reduction or increaser parts, the Part Number changes as follows:

MT and JL - Diameter of Body listed in front of Model VSI or IVSI.
Diameter of Snout listed in front of Code designation

Example - For a Manifold Tee with a 42" dia. Body and 30" dia. Snout:

42VSI304-30MT

OT and OS - Smaller diameter listed first (before Model designation) Larger diameter listed before Code designation

Example - For a Tapered Increaser with an 8" to 16" dia. Body:

8VSI304-16OT

Overlapping Vee Band

Code: VB

Vee Band for connecting the inner 1/2 inch rolled flanges. Capable of holding 60" w.c. of pressure when properly installed.



Materials Available:

All Stainless Construction

Channel Band

Code: CB

Used to seal the Outer Jackets of two adjoining components.

(CB height is 4-3/4")



Materials Available:

Aluminized Steel / 316

Half Channel Band

Code: HCB

Used to seal the Outer Jackets of two adjoining components when the VB must remain open (such as PA's). (HCB height is 2-1/16")



Materials Available:

Aluminized Steel / 316

Notes: (VB)

1. All VB's are a two piece design
2. Model VSI part used for all IVSI applications.

Notes: (CB, HCB)

1. Fiber insulation provided for IVSI models.

Low Temperature Sealant

Code: P600

High Temperature Sealant

Code: P2000

Depending upon application, either AMPCO's low or high-temperature sealants are applied to the VB before connecting two Inner Pipes at installation.

As designated, P600 Sealant is for 600° F maximum flue gas temperatures, and also for exterior weathering of pipe, while P2000 is capable for flue gases up to 2,000° F (Not to be used externally)



Sealant Coverage

Expected Number of Joints Sealed Per Tube


Inner Dia. (inches)	P600 & P2000
5/6	10
8/10	9
12	8
14/16	7
18/20	6
22/24	5
26/28	4
30/32	3
36	2
42/48	1

The Four Easy Steps to Joint Assembly

For all AMPCO pipe and fittings, the flange-to-flange inner pipe joints are identical for each pipe inside diameter.

Temperature of gases carried in the system determines the proper sealant used.*

As shown in the adjoining illustration and photos, assembly is accomplished in four easy steps, using only standard tools.

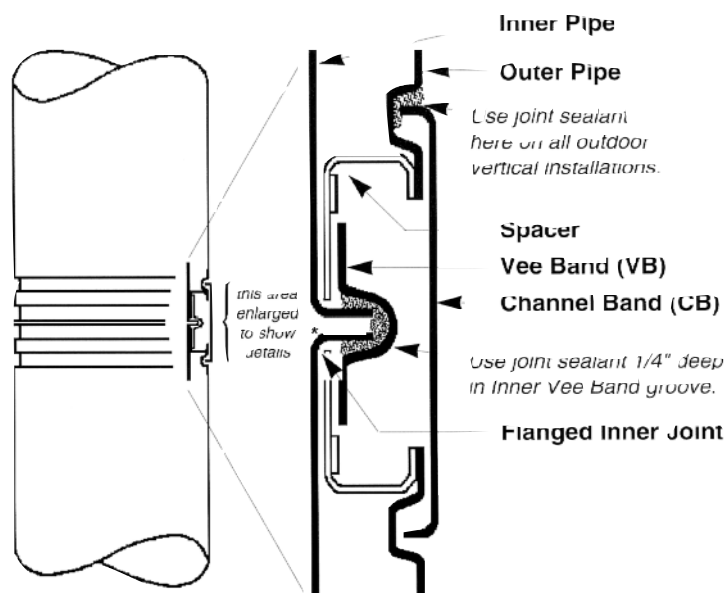

*See Grease Duct, Boiler Stack, or Engine Exhaust instructions for correct sealant usage.



Step 1

Fill Inner Vee Band (VB) with proper sealant.



Step 2

Position Inner VB below flange of pipe or fitting.



Step 3

Mate flanges of two pipes.
Position Inner VB over both flanges and tighten.



Step 4

Position Outer Channel Band around outer casing. Align with pipe grooves and tighten.

Straight Pipe Lengths

Codes: 60, 42, 30, 18



*Materials Available :

304/ALZ

316/ALZ

304/304

316/316

- 60" lengths available in 8" dia to 14" dia, all models, ALZ outer only
- 42" lengths available in:
 - 6" dia. through 32" I.D., VSI and IVSI-C1
 - 6" dia. through 28" I.D., IVSI-C2
 - 6" dia. through 24" I.D., IVSI-C4
- 18" & 30" lengths available in all Inner diameters (5"-48") of all products (VSI, IVSI-C1, IVSI-C2, and IVSI-C4).

Ordered Part Includes:

Pipe, plus one VB and one CB.

Notes:

1. Special pipe lengths from 5" to 60" available upon request.
2. K Factors (Where L = pipe length in feet and D = pipe diameter in inches)
 - a. For Boiler Stacks and Chimneys:

$$K = 0.30 \frac{L}{D}$$
 - b. For Diesel and Turbine Exhausts and Grease Ducts:



$$K = 0.25 \frac{L}{D}$$
- e.g. for 50 feet of 10 inch diameter pipe

$$K = 0.25 \frac{50}{10} = 1.25$$

Adjustable Pipe Lengths

Codes: AG30, AG18

Fills odd dimensions and compensates for expansion between two fixed points on low pressure applications.

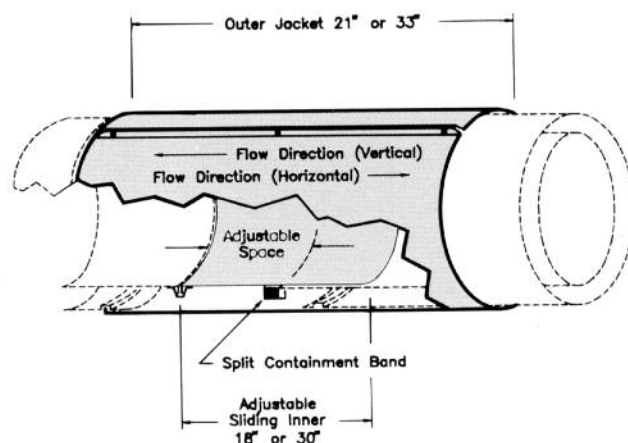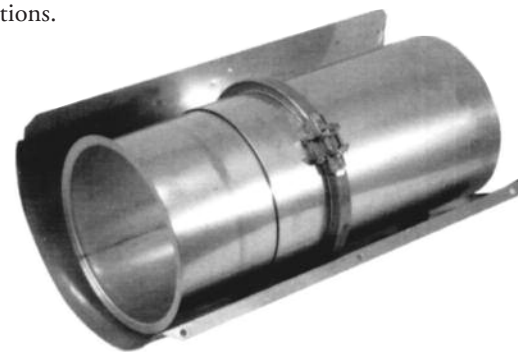

*Materials Available:

304/ALZ

316/ALZ

304/304

316/316

Ordered Part Includes:

Pipe, plus one 30" or 18" inner Slip Section, one TSU, one Packing Seal, one two-piece Compression Band, one two-piece Containment Ring, one two-piece Outer Jacket, and one VB.

Fiber insulation provided for IVSI models.


Notes:

1. Minimum installed length is 4".
2. AG 18 not available for 28" diameter and above.
3. Maximum installed space is when the inner slip section protrudes at least 1/2 pipe diameter into the adjacent pipe.
4. Flow Resistance Factor (K) is the same as insulated pipe lengths.

Lined Bellows Joint

Code: BJ

Provides a pressure tight expansion joint for engine exhaust and other high pressure applications.



Materials Available:

316/316

316/ALZ

Ordered Part Includes:

BJ, plus one Liner, one Outer Jacket (IVSI only), and one VB.

Fiber insulation provided for IVSI models.

Notes:


1. Optional to standard adjustable pipe lengths on low pressure systems.
2. Liner protects Bellows but limits movement to liner expansions only.
3. Flow Resistance Factor (K) is the same as insulated pipe.
4. Part is not available above 24" diameter

Variable Pipe Lengths

Codes: VL30, VL18

Fills odd dimensions between standard lengths. (Not used to compensate for thermal expansion.)

- VL30 fills 4" - 26" space.
- VL18 fills 4" - 14" space.

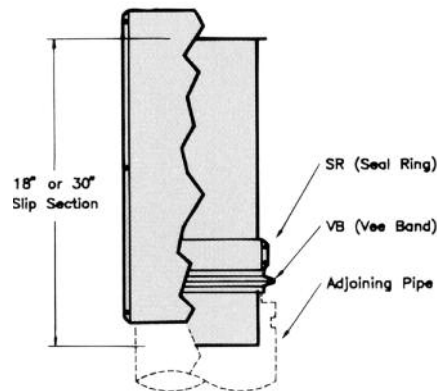

Materials Available:

304/ALZ

316/ALZ

304/304

316/316

Ordered Part Includes:

VL30 or VL18, plus one 30" or 18" Inner Slip Section, one two-piece Outer Jacket, one SR, and one VB.

Fiber insulation provided for IVSI models.


Notes:

1. The SR is sealed with supplied sealant, not allowing the VL to compensate for expansion.
2. Flow Resistance Factor (K) is the same as insulated pipe.

90° Manifold Tee

Code: MT

Joins vertical and horizontal sections to affect a change of direction. Also provides for connection of drain or inspection fittings.



Dimension A

VSI/IVSI-C1	IVSI-C2	IVSI-C4
4"	5"	7"

Materials Available:

304/ALZ

316/ALZ

304/304

316/316

Ordered Part Includes:

MT, plus one VB for the body diameter, one VB for the snout diameter, and one CB for the body diameter.



Notes:

1. Use TCN/NTAC for clean out or inspection, or TC for drain at base of vertical stack.
2. Snout available in any standard diameter equal to or smaller than the body diameter.
3. K = 1.25 Flow Resistance Factor

90° Grease Duct Tee

Code: GMT

Part MT with dam added for protection against fluids running out while cleaning. Used at 90 deg. turns only.

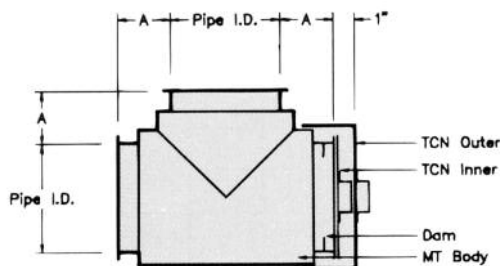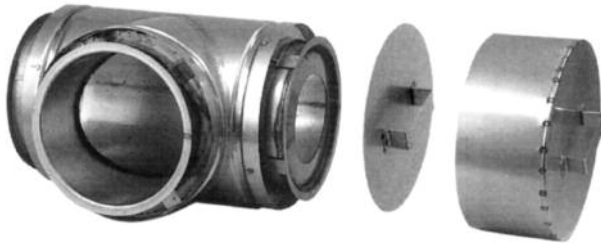

Dimension A

VSI/IVSI-C1	IVSI-C2	IVSI-C4
4"	5"	7"

Materials Available:

304/ALZ	316/ALZ	304/304	316/316
---------	---------	---------	---------

Ordered Part Includes:

GMT, plus one TCN, two VB's and one CB.


Notes:

1. K = 1.25 Flow Resistance Factor

45° Lateral Tee

Code: JL

Provides a low resistance entry into manifolds. Combine with EL45 for low resistance 90° direction change.

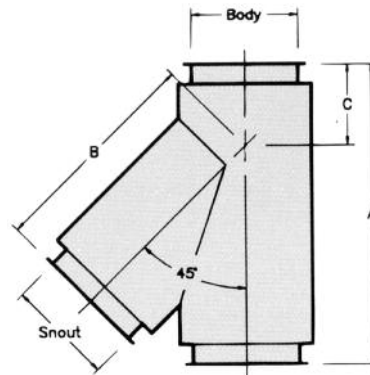

Materials Available:

304/ALZ	304/ALZ	304/ALZ	304/ALZ
---------	---------	---------	---------

Ordered Part Includes:

JL, plus one VB for the body diameter, one VB for the snout diameter, and one CB for the body diameter.

Notes:


1. Snout available in any standard diameter equal to or smaller than the body diameter. 2. K = 0.4 Flow Resistance Factor

Product				Dimensions		
O. D.	Pipe I. D.			Inches		
	VSI IVSI-1	IVSI C2	IVSI C4	A	B	C
7	5	—	—	19½	13¾	5¾
8/9	6	5	—	19½	13¾	5¾
10	8	6	—	22⅞	16⅞	6¼
12	10	8	—	24⅞	19	5⅞
14	12	10	6	26⅞	21⅞	5½
16	14	12	8	29¼	23⅞	5⅞
18	16	14	10	32⅞	26¼	6⅞
20	18	16	12	35⅞	28¼	6¼
22	20	18	14	38⅞	31⅞	7⅞
24	22	20	16	43⅞	35⅞	8
26	24	22	18	43⅞	35⅞	8
28	26	24	20	49⅞	40¼	8⅞
30	28	26	22	49⅞	40¼	8⅞
32	30	28	24	55⅞	45⅞	9⅞
34	32	30	26	55⅞	45⅞	9⅞
36	—	32	28	60⅞	50⅞	10⅞
38	36	—	30	60⅞	50⅞	10⅞
40	—	36	32	69⅞	58¼	11¾
44	42	—	36	69⅞	58¼	11¾
46	—	42	—	79⅞	66⅞	13
50	48	—	42	79⅞	66⅞	13
52	—	48	—	88⅞	74¼	14⅞
56	—	—	48	88⅞	74¼	14⅞

90° WYE

Code: JY

Provides low pressure drop for joining appliances in the horizontal and vertical position.



Materials Available:

304/ALZ

316/ALZ

304/304

316/316

Ordered Part Includes:

JY, plus two VB's and one CB.

Notes:


1. All openings are the same diameter.
2. Can be used with TCN to provide a single clean out toward each 90° direction change.
3. Use OT or OS as needed for smaller branch connections.
4. $K = 0.6$ Flow Resistance Factor

O. D.	Product			Dimensions	
	VSI IVSI-C1	IVSI C2	IVSI C4	inches	
				A	B
7	5	—	—	4 $\frac{7}{8}$	9
8/9	6	5	—	4 $\frac{7}{8}$	9
10	8	6	—	5 $\frac{1}{16}$	10
12	10	8	—	5	11
14	12	10	6	5 $\frac{1}{2}$	12
16	14	12	8	5 $\frac{7}{8}$	13
18	16	14	10	6 $\frac{1}{8}$	14
20	18	16	12	6 $\frac{1}{2}$	15
22	20	18	14	7 $\frac{1}{8}$	17
24	22	20	16	8	19
26	24	22	18	8	19
28	26	24	20	8 $\frac{3}{4}$	22
30	28	26	22	8 $\frac{3}{4}$	22
32	30	28	24	9 $\frac{1}{8}$	24
34	32	30	26	9 $\frac{1}{8}$	24
36	—	32	28	10 $\frac{1}{2}$	27
38	36	—	30	10 $\frac{1}{2}$	27
40	—	36	32	11 $\frac{1}{4}$	31
44	42	—	36	11 $\frac{1}{4}$	31
46	—	42	—	13	34
50	48	—	42	13	34
52	—	48	—	14 $\frac{1}{4}$	38
56	—	—	48	14 $\frac{1}{4}$	38

Drain Tee Cap

Code: TC & TCN


The Drain Tee Cap provides a drain at the base of a vertical chimney when connected to the MT or J

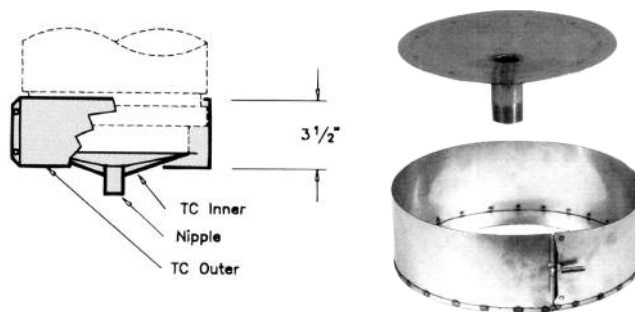

Ordered Part Includes: TC, plus one 1" N.P.T.

Nipple (5"-20" sizes), or 2" N.P.T. Nipple

(22"-48" sizes), one Inner Section, one Outer Jacket, and one VB. Fiber insulation provided for IVSI models.

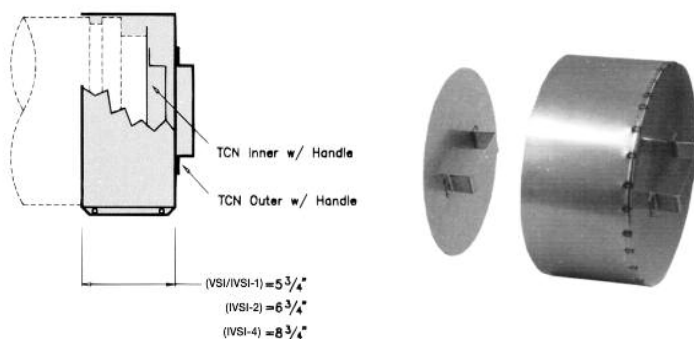

Ordered Part Includes: TCN, plus one Inner Section (with handle), one Outer Jacket (with handle) and one VB. Fiber Insulation provided for IVSI Models.

Materials Available (both TC and TCN):

304/ALZ

316/ALZ


304/304

316/316

No Tool Access Cap Code: NTAC



Provides for toolless Cleanout and/or dam when connected to MT or JL.

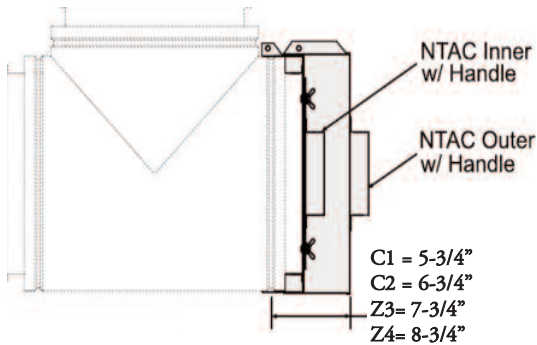

Materials Available:

304/ALZ	316/ALZ	304/304	316/316
---------	---------	---------	---------


Ordered Parts Include:

NATC, plus one dam, insulation, shield, outer cover and one VB. Fiber insulation provided for IVSI models.

15° Elbow

Code: EL 15

Two-piece Elbow can establish many different degrees when combined with other standard Elbows.

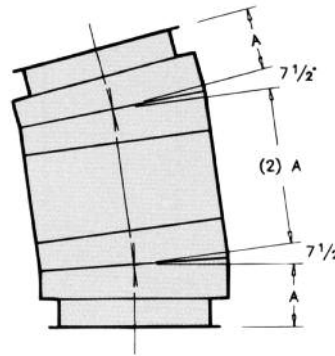

Materials Available:

304/ALZ	304/ALZ	304/ALZ	304/ALZ
---------	---------	---------	---------

Ordered Part Includes:

Two 7 1/2° Elbows, plus two CB's, and two VB's.

Notes:


1. K = 0.06 Flow Resistance Factor

O. D.	Product			Dim.
	VSI	IVSI	IVSI	Inches
	IVSI-1	C2	C4	A
7	5	—	—	4 ³ / ₁₆
8/9	6	5	—	4 ³ / ₁₆
10	8	6	—	4 ¹ / ₄
12	10	8	—	4 ⁵ / ₁₆
14	12	10	6	7 ¹ / ₁₆
16	14	12	8	4 ¹ / ₂
18	16	14	10	4 ⁷ / ₁₆
20	18	16	12	4 ⁹ / ₁₆
22	20	18	14	4 ¹¹ / ₁₆
24	22	20	16	4 ¹³ / ₁₆
26	24	22	18	4 ¹⁵ / ₁₆
28	26	24	20	4 ¹⁷ / ₁₆
30	28	26	22	4 ¹⁹ / ₁₆
32	30	28	24	5
34	32	30	26	5 ¹ / ₁₆
36	—	32	28	5 ¹ / ₈
38	36	—	30	5 ³ / ₁₆
40	—	36	32	5 ⁵ / ₁₆
44	42	—	36	5 ⁹ / ₁₆
46	—	42	—	5 ¹ / ₂
50	48	—	42	5 ¹³ / ₁₆
52	—	48	—	5 ¹⁵ / ₁₆
56	—	—	48	5 ¹⁷ / ₁₆

30° Elbow

Code: EL30

Used for a vertical or horizontal direction change of 30°.

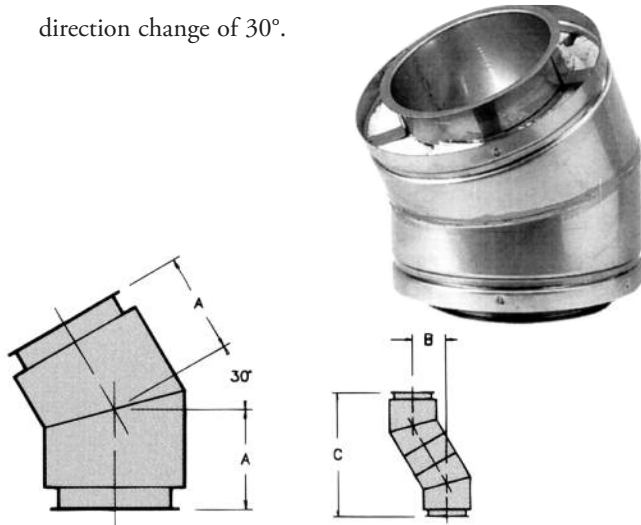

Materials Available:

304/ALZ	316/ALZ	304/304	316/316
---------	---------	---------	---------

Ordered Part Includes:

EL 30, plus one CB and one VB.

Notes:


1. K = 0.12 Flow Resistance Factor

O. D.	Product				Dimensions		
	Pipe I. D.				Inches		
	VSI IVSL-C1	IVSI C2	IVSI C4		A	B	C
7	5	—	—		6 $\frac{1}{8}$	6 $\frac{1}{8}$	22 $\frac{3}{8}$
8/9	6	5	—		6 $\frac{1}{8}$	6 $\frac{1}{8}$	22 $\frac{3}{8}$
10	8	6	—		6 $\frac{1}{8}$	6 $\frac{1}{8}$	23 $\frac{3}{8}$
12	10	8	—		6 $\frac{1}{16}$	6 $\frac{1}{16}$	24 $\frac{3}{8}$
14	12	10	6		7 $\frac{1}{16}$	7 $\frac{1}{16}$	27 $\frac{1}{4}$
16	14	12	8		7 $\frac{1}{8}$	7 $\frac{1}{8}$	29 $\frac{1}{8}$
18	16	14	10		8 $\frac{1}{4}$	8 $\frac{1}{4}$	30 $\frac{1}{8}$
20	18	16	12		8 $\frac{3}{8}$	8 $\frac{3}{8}$	31 $\frac{1}{8}$
22	20	18	14		9 $\frac{1}{8}$	9 $\frac{1}{8}$	34 $\frac{1}{4}$
24	22	20	16		9 $\frac{3}{8}$	9 $\frac{3}{8}$	35
26	24	22	18		10 $\frac{1}{16}$	10 $\frac{1}{16}$	37 $\frac{1}{2}$
28	26	24	20		10 $\frac{1}{8}$	10 $\frac{1}{8}$	38 $\frac{1}{2}$
30	28	26	22		11	11	40 $\frac{1}{4}$
32	30	28	24		11 $\frac{1}{4}$	11 $\frac{1}{4}$	41 $\frac{1}{4}$
34	32	30	26		11 $\frac{1}{2}$	11 $\frac{1}{2}$	44 $\frac{1}{4}$
36	—	32	28		12 $\frac{1}{16}$	12 $\frac{1}{16}$	45 $\frac{1}{8}$
38	36	—	30		12 $\frac{1}{8}$	12 $\frac{1}{8}$	47 $\frac{1}{4}$
40	—	36	32		13 $\frac{1}{8}$	13 $\frac{1}{8}$	48 $\frac{1}{8}$
44	42	—	36		14	14	52 $\frac{1}{2}$
46	—	42	—		14 $\frac{1}{4}$	14 $\frac{1}{4}$	53 $\frac{1}{8}$
50	48	—	42		14 $\frac{3}{16}$	14 $\frac{3}{16}$	56 $\frac{1}{16}$
52	—	48	—		15 $\frac{1}{16}$	15 $\frac{1}{16}$	57 $\frac{1}{8}$
56	—	—	48		15 $\frac{1}{8}$	15 $\frac{1}{8}$	57 $\frac{1}{4}$

45° Elbow

Code: EL45

Used for a vertical or horizontal direction change of 45°.

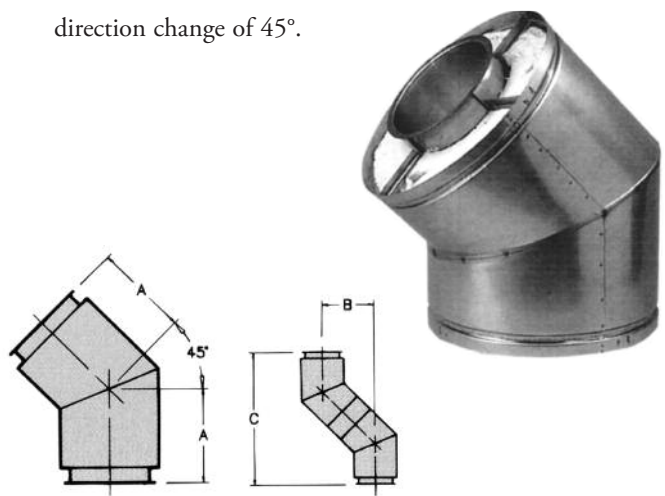

Materials Available:

304/ALZ	304/ALZ	304/ALZ	304/ALZ
---------	---------	---------	---------

Ordered Part Includes:

EL45, plus One CB and one VB.

Notes:


1. K = 0.15 Flow Resistance Factor

O. D.	Product				Dimensions		
	Pipe I. D.				Inches		
	VSI IVSL-C1	IVSI C2	IVSI C4		A	B	C
7	5	—	—		8 $\frac{1}{2}$	12	29
8/9	6	5	—		8 $\frac{1}{2}$	12	29
10	8	6	—		8 $\frac{1}{16}$	12 $\frac{1}{8}$	30 $\frac{1}{8}$
12	10	8	—		9 $\frac{1}{16}$	13 $\frac{1}{16}$	31 $\frac{1}{8}$
14	12	10	6		10 $\frac{1}{4}$	14 $\frac{1}{2}$	35
16	14	12	8		10 $\frac{1}{16}$	14 $\frac{3}{8}$	35 $\frac{1}{8}$
18	16	14	10		11 $\frac{1}{8}$	16 $\frac{1}{16}$	39 $\frac{1}{8}$
20	18	16	12		12 $\frac{1}{16}$	17 $\frac{1}{16}$	41 $\frac{1}{8}$
22	20	18	14		13	18 $\frac{1}{8}$	44 $\frac{1}{4}$
24	22	20	16		13 $\frac{1}{16}$	18 $\frac{1}{16}$	45 $\frac{1}{2}$
26	24	22	18		14 $\frac{1}{16}$	20 $\frac{1}{4}$	48 $\frac{1}{8}$
28	26	24	20		14 $\frac{3}{8}$	21 $\frac{1}{16}$	50 $\frac{1}{8}$
30	28	26	22		15 $\frac{1}{16}$	22 $\frac{1}{16}$	53 $\frac{1}{2}$
32	30	28	24		16 $\frac{1}{4}$	22 $\frac{1}{16}$	53 $\frac{3}{8}$
34	32	30	26		17	24	58
36	—	32	28		17 $\frac{1}{16}$	24 $\frac{3}{4}$	59 $\frac{1}{8}$
38	36	—	30		18 $\frac{1}{8}$	25 $\frac{1}{16}$	62 $\frac{1}{8}$
40	—	36	32		18 $\frac{3}{8}$	26 $\frac{1}{16}$	64 $\frac{1}{2}$
44	42	—	36		19 $\frac{1}{16}$	27 $\frac{1}{8}$	67
46	—	42	—		20 $\frac{1}{8}$	28 $\frac{1}{16}$	68 $\frac{1}{8}$
50	48	—	42		21 $\frac{1}{16}$	30 $\frac{1}{16}$	74 $\frac{1}{8}$
52	—	48	—		21 $\frac{1}{8}$	30 $\frac{1}{8}$	74 $\frac{1}{4}$
56	—	—	48		21 $\frac{1}{4}$	30 $\frac{1}{4}$	74 $\frac{1}{2}$

90° Elbow

Code: EL90

Used for a vertical or horizontal direction change of 90°.



Materials Available:

304/ALZ	316/ALZ	304/304	316/316
---------	---------	---------	---------

Ordered Part Includes:

EL90, plus one CB and one VB.

Notes:



1. K = 0.30 Flow Resistance Factor

O. D.	Product			Dim.
	VSI IVSI-1	IVSI C2	IVSI C4	Inches A
7	5	—	—	10½
8/9	6	5	—	11½
10	8	6	—	12½
12	10	8	—	13½
14	12	10	6	14½
16	14	12	8	15½
18	16	14	10	16½
20	18	16	12	17½
22	20	18	14	18½
24	22	20	16	19½
26	24	22	18	20½
28	26	24	20	21½
30	28	26	22	22½
32	30	28	24	23½
34	32	30	26	24½
36	—	32	28	25½
38	36	—	30	26½
40	—	36	32	27½
44	42	—	36	29½
46	—	42	—	30½
50	48	—	42	32½
52	—	48	—	33½
56	—	—	48	35½

Tapered Increaser/Reducer

Code: OT

Used when a pipe diameter change is required.

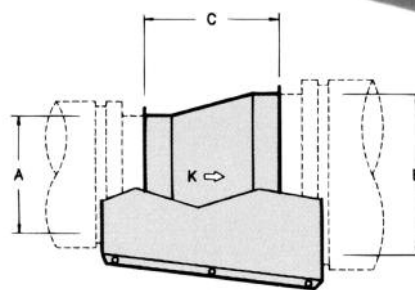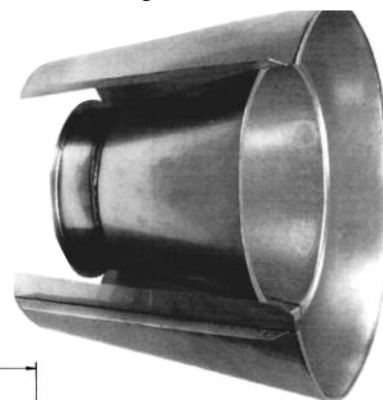

Materials Available :

304/ALZ	316/ALZ	304/304	316/316
---------	---------	---------	---------

Dimensions:

A = Smaller Diameter

B = Larger Diameter

C = Installed Length = [(B-A) 2] + 2 (see Note 1 below)

Example:

Installed Length for 12VSI304-18OT equals [(18-12)2] + 2 = 14".

Ordered Part Includes:

OT, plus one two-piece Outer Jacket, and one VB for smaller diameter.

Fiber insulation provided for IVSI models.

Notes:



1. Installed length shall not be greater than longest available straight pipe length (see page 7) for each diameter.

2. $K = N [1 - (A/B)^2]^2$ where N = 0.47 for one step OT
N = 0.53 for two step OT

Step Increaser/Reducer

Code: OS

Used when pipe diameter change is required in a small space.

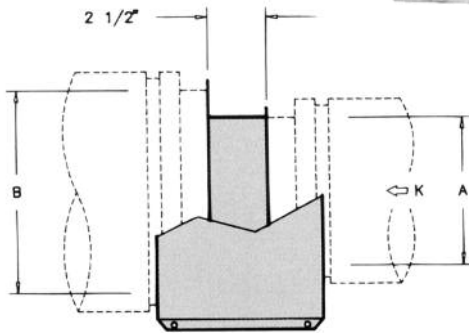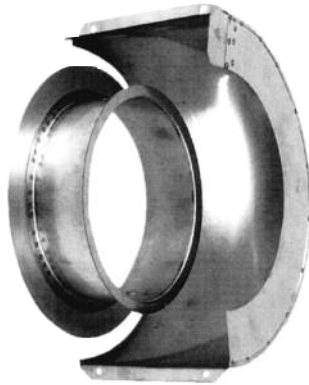

Materials Available

304/ALZ	316/ALZ	304/304	316/316
---------	---------	---------	---------

Ordered Part Includes:

OS (Inner Stepped Pipe), plus one two-piece Outer Jacket, and one VB for the smaller diameter.

Fiber insulation provided for IVSI models.


Notes:

1. This is a non-structural part; use only if OT will not fit within the allowable space.
2. $K = N [1 - (A/B)^2]^2$

Drain Section

Code: DS

Used with open stack terminations for draining off rain water from inside vertical or horizontal flue.

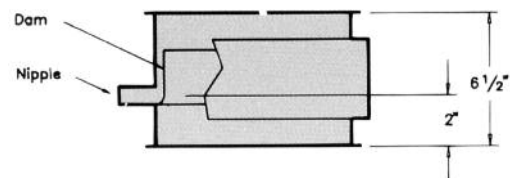

Materials Available:

Ordered Part Includes:

304/ALZ	316/ALZ	304/304	316/316
---------	---------	---------	---------

DS, plus one Drain Dam within the pipe length, one 1" Nipple, one CB, and one VB.


Notes:

1. $K = 0.25$ Flow Resistance Factor

Angle Rings

Codes: HR & FR

Used for guiding and/or supporting horizontal installations.

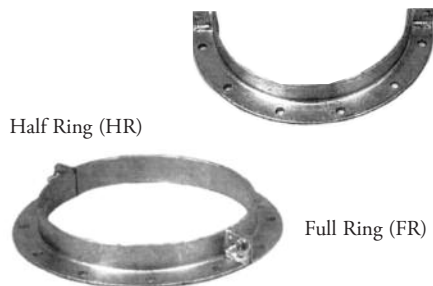

Materials Available:

Painted Steel

Notes:

1. Model VSI part used for IVSI-C1 applications.

Product			Dimensions (inches) - HR				
(pipe I. D.)			Bolt Hole Circle	I.D. of Ring	No of Holes (HR)	Size of Angles	Angle of Holes
VSI	VSI-C2	VSI-C4					
5	—	—	9	7 $\frac{1}{8}$	6	(1)	45
6	5	—	10	8 $\frac{1}{8}$	6	(1)	45
8	6	—	12	10 $\frac{1}{8}$	6	(1)	45
10	8	—	14	12 $\frac{1}{8}$	6	(1)	45
12	10	6	16	14 $\frac{1}{8}$	6	(1)	45
14	12	8	18	16 $\frac{1}{8}$	6	(1)	45
16	14	10	20	18 $\frac{1}{8}$	6	(1)	45
18	16	12	22	20 $\frac{1}{8}$	6	(1)	45
20	18	14	24	22 $\frac{1}{8}$	6	(1)	45
22	20	16	26	24 $\frac{1}{8}$	10	(2)	22.5
24	22	18	28	26 $\frac{1}{8}$	10	(2)	22.5
26	24	20	30	28 $\frac{1}{8}$	10	(2)	22.5
28	26	22	32	30 $\frac{1}{8}$	10	(2)	22.5
30	28	24	34	32 $\frac{1}{8}$	10	(2)	22.5
32	30	26	36	34 $\frac{1}{8}$	10	(2)	22.5
—	32	28	38	36 $\frac{1}{8}$	10	(2)	22.5
36	—	30	40	38 $\frac{1}{8}$	10	(2)	22.5
—	36	32	42	40 $\frac{1}{8}$	10	(2)	22.5
42	—	36	46	44 $\frac{1}{8}$	10	(2)	22.5
—	42	—	48	46 $\frac{1}{8}$	10	(2)	22.5
48	—	42	52	50 $\frac{1}{8}$	10	(2)	22.5
—	48	—	54	62 $\frac{1}{8}$	10	(2)	22.5
—	—	48	58	66 $\frac{1}{8}$	10	(2)	22.5



(1) Size of Angles = 1 $\frac{1}{2}$ x 1 $\frac{1}{2}$ x $\frac{3}{16}$

(2) Size of Angles = 2 x 2 x $\frac{3}{16}$

Plate Support Assembly

Code: PA

Used for supporting the load of the stack, and as a fixed point anchor near fittings.

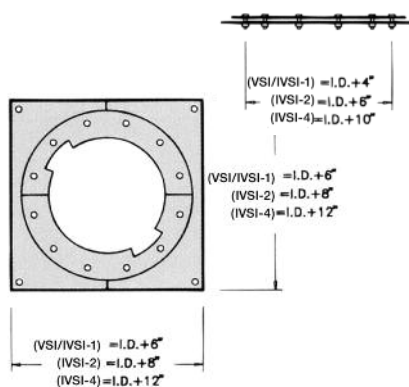

Materials Available:

Painted Steel

Ordered Part Includes:

Split (square) plate, one CF, two HCB's and hardware.

Plate Thickness:

0.188" for sizes 6" through 20" diameters

0.250" for sizes 22" through 36" diameters

0.375" for sizes 42" through 48" diameters

Notes:


1. Two 316 Stainless Steel HCB's should be ordered separately for stainless steel outer wall projects.

2. PA plates fabricated from Stainless Steel is available upon request and is non-returnable. Allow extra manufacturing time.

Wall Support Assembly

Code: WA

"Limited" support assembly with factory-supplied bracing.

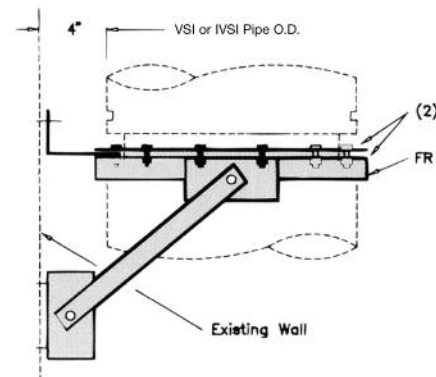

Materials Available:

Ordered Part Includes:

Painted Steel

One FR, two CF's, two HCB's, five brackets, two struts, and all hardware except connection at wall.


Notes:

1. Assembly will maintain a 4" clearance between pipe O.D. and supporting structure.

Wall Guide Assembly

Code: WG

Same use as FIR, but with factory-supplied bracing.

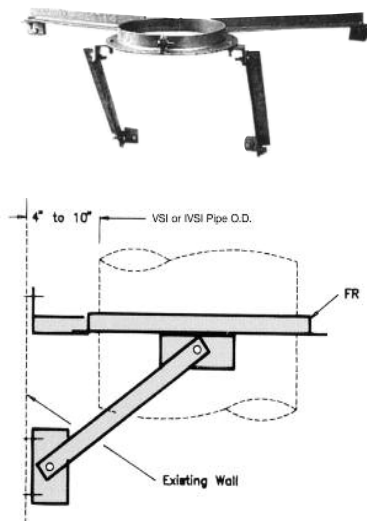

Materials Available:

Painted Steel

Ordered Part Includes:

One FR, four struts, and six brackets.

Notes:


1. Assembly will maintain a 2" to 10" clearance between pipe O.D. and supporting structure.
2. Model VSI part used for IVSI-1 applications.

Support Strap

Code: SS

Available in 5 through 26" PS only.


0.188" Thick Hot Rolled Steel

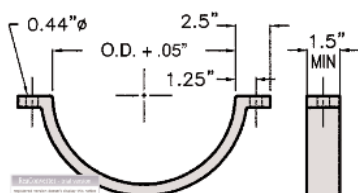

Floor Guide Assembly

Code: FG

Same use as FR, but with factory-supplied bracing for use at floor level.

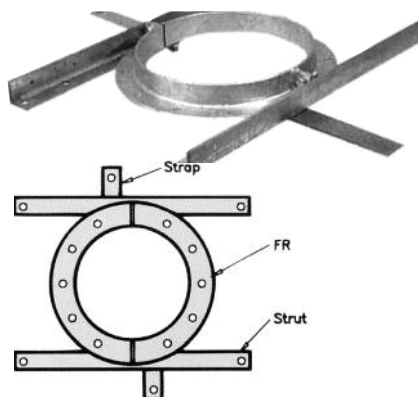

Materials Available:

Painted Steel

Ordered Part Includes:

One FR, two struts, and two straps.

Notes:

1. Maximum hole through floor should not exceed the pipe O.D. plus 8".
2. Model VSI part used for IVSI-1 applications.



Pipe I.D. (inches)			Material (inches)	
VSI	IVSI-C2	IVSI-C4	Strut Length	Strut Size
5	—	—	17½	(1)
6	—	—	18	(1)
—	5	—	19½	(1)
8	6	—	21	(1)
—	—	5	22½	(1)
10	8	—	24	(1)
12	10	6	27	(1)
14	12	8	29	(2)
16	14	10	30	(2)
18	16	12	32	(2)
20	18	14	33	(2)
22	20	16	34½	(3)
24	22	18	36	(3)
26	24	20	37	(3)
28	26	22	38	(3)
30	28	24	39½	(3)
32	30	26	41	(3)
—	32	28	42½	(3)
36	—	30	44	(3)
—	36	32	46	(3)
42	—	—	48	(3)
—	42	36	50	(3)
—	—	42	52	(3)
48	—	—	53	(3)
—	48	—	54	(3)
—	—	48	58	(3)

- (1) Steel Angle, 1½" x 1½" x ⅝"
- (2) Steel Angle, 1¾" x 1¾" x ⅝"
- (3) Steel Angle, 2" x 2" x ⅝"

Boiler Kit Adapter

Code: BK

Used to transition to a flanged appliance. Features 24 connection slots to mate 4, 6, 8 or 12 bolt hole patterns

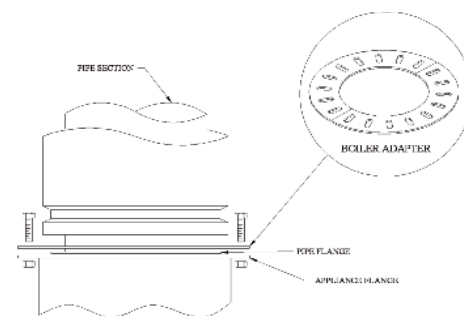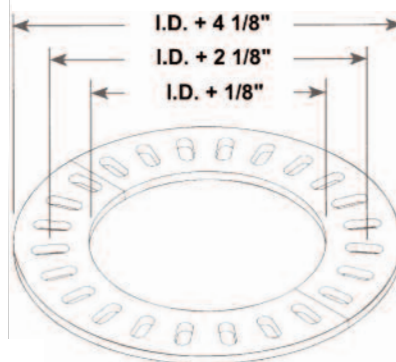

24 holes .375 x 1.0 at 15 degrees
Constructed of 1/4" hot-rolled steel.

Materials Available:

Painted Steel

Ordered Part Includes:

Two Half Boiler Adapter Flange Plates


Notes:

Order HCB's separately if needed.

Seal Ring

Code: SR

Used for non-welded attachment to appliances having an unflanged or collar outlet.

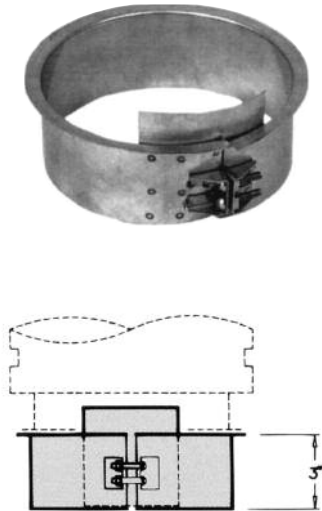

Materials Available:

304/ALZ	316/ALZ	304/304	316/316
---------	---------	---------	---------

Ordered Part Includes:

SR, plus one VB, one CB, and hardware.


Notes:

1. Model VSI part used for all IVSI applications.

Flange Adapter

Code: FD

Provides a rigid connection to a 125 lb. or 150 lb ANSI flange.

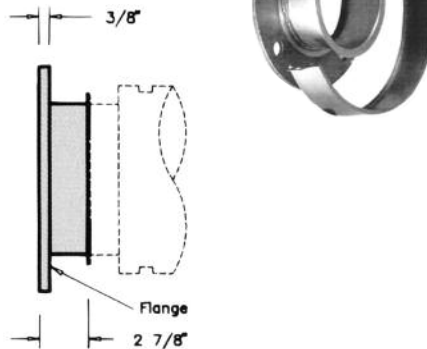

Materials Available:

304/ALZ	316/ALZ	304/304	316/316
---------	---------	---------	---------

Ordered Part Includes:

Flange welded to TS, one CB, and one VB.

Fiber insulation provided for IVSI models.

Product	Dimensions (inches)			
	Pipe I.D.	No. of Bolts	Bolt Hole Dia.	Flange O.D.
5	8	8	7/8	10
6	8	8	7/8	11
8	8	8	7/8	13 1/2
10	12	12	1	16
12	12	12	1	19
14	12	12	1 1/8	21
16	16	16	1 1/8	23 1/2
18	16	16	1 1/4	25
20	20	20	1 1/4	27 1/2
22	20	20	1 1/8	29 1/2
24	20	20	1 1/8	32
28	28	28	1 1/8	36 1/2
30	28	28	1 1/8	38 1/2
32	28	28	1 1/8	41 1/4
36	32	32	1 1/8	46
42	36	36	1 1/8	53
48	44	44	1 1/8	59 1/2

Clamp Flange

Code: CF

Can be used as an attachment to flanged equipment (also part of PA and WA).



A = Flange O.D. VSI/IVSI-1 = I.D. + 5" C2 = I.D. + 8" C4 = I.D. + 12"
B = Bolt Hole Circle VSI/IVSI-1 = I.D. + 4" C2 = I.D. + 6" C4 = I.D. + 10"
C = Flange I.D. VSI/IVSI-1 = I.D. + 1/2" C2, C4

Materials Available:

Painted Steel

Ordered Part Includes:

Two half clamp flange plates.


Notes:

1. 0.129" minimum thickness for sizes 5" to 8" diameters.
2. 0.188" minimum thickness for sizes 10" through 36" diameters.
3. 0.275" minimum thickness for sizes 38" through 48" diameters.
4. Model VSI part used for IVSI-1 applications.
5. Order HCB's separately if needed.

Flanged Hood Transition

Code: TS

Used on standard appliances such as kitchen hood exhausts. Flanged at both ends.

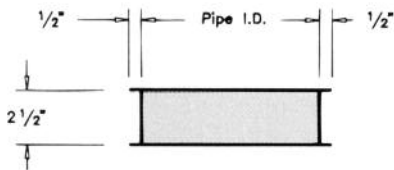

Materials Available :

304/ALZ	316/ALZ	304/304	316/316
---------	---------	---------	---------

Ordered Part Includes:

TS, plus one CB and one VB.

Fiber insulation provided with IVSI models.


Notes:

1. Can be used for welding to equipment or transitions fabricated in the field.

Unflanged Hood Transition

Code: TSU

Used on standard appliances such as kitchen hood exhausts. Flanged at one end.

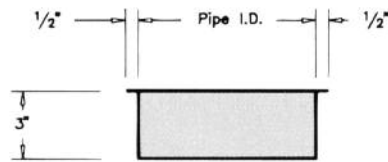

Materials Available:

304/ALZ	316/ALZ	304/304	316/316
---------	---------	---------	---------

Ordered Part Includes:

TSU, plus one CB and one VB.

Fiber insulation provided with IVSI models.


Notes:

1. Can be used for welding to equipment or transitions fabricated in the field.

Fan Adapter

Code: FA

Used for connection to an "up-blast" kitchen exhaust fan.

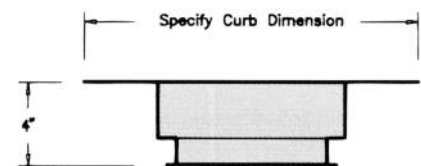

Materials Available:

304/ALZ	316/ALZ	304/304	316/316
---------	---------	---------	---------

Ordered Part Includes:

FA, plus one VB and one CB.


Notes:

1. Dimension of square plate (which is sandwiched between curb and fan housing) must be specified when ordering.

Storm Collar

Code: SC

Used above the TF and PTF for complete weatherization above the roof.

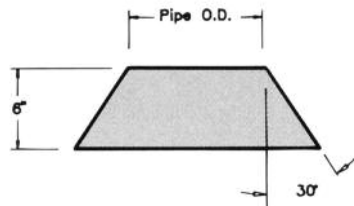

Materials Available:

ALZ or Galv.	304	316
--------------	-----	-----

Ordered Part Includes:

SC, plus hardware.


Notes:

1. Requires P600 sealant when installing.
2. Model VSI part used for IVSI-1 applications.

Tall Flashing

Code: TF

Used in conjunction with SC for weatherization at the roof.

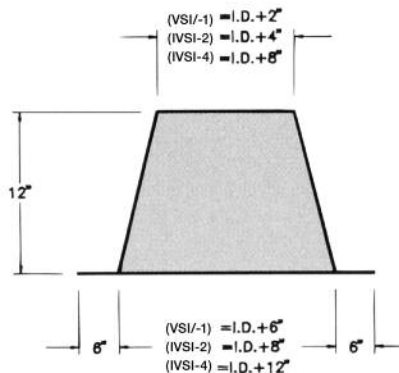

Materials Available:

ALZ or Galv.	304	316
--------------	-----	-----

Ordered Part Includes:

TF only.


Notes:

1. Use limited to installations where complete roof penetration is non-combustible.
2. Model VSI part used for IVSI-1 applications.

Pitched Tall Flashing

Code: PTF

Same function as TF, except for use on a pitched roof.

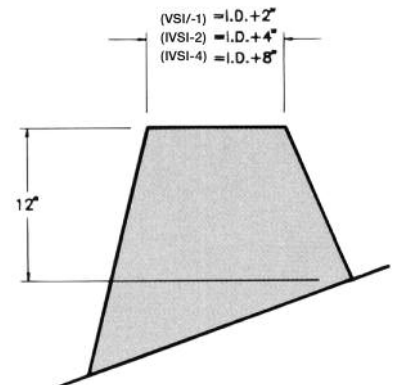

Materials Available:

ALZ or Galv.	304	316
--------------	-----	-----

Ordered Part Includes:

PTF only (specify pitch when ordering).



Notes:

1. Part is non-returnable and may require extra manufacturing time.
2. Use limited to installations where complete roof penetration is non-combustible.
3. Model VSI part used for IVSI-1 applications.

Ventilated Thimble

Code: THB

Body part of MVT, MRS, and PVT. Also can be used by itself for a wall penetration.



Materials Available:



Galvanized Steel

Model VSI part used for IVSI-C1 applications.

Ventilated Tall Flashing

Code: VTF

Encloses the THB, offers protection from weather and moisture penetration. Part of MVT, MRS



Materials Available :

ALZ or Galv



304

316

Ventilated Storm Collar

Code: VSC

Protects the VTF from weather/moisture penetration. Part of MVT, MRS, PVT. Can be used for wall penetration along with a THB



Materials Available:

ALZ or Galv

304



316

Model VSI part used for IVSI-1 applications.

Ventilated Roof Thimble Assembly

Code: MVT

For use where pipe passes through a combustible roof or structure. Also guides the chimney 6" above the roof line.

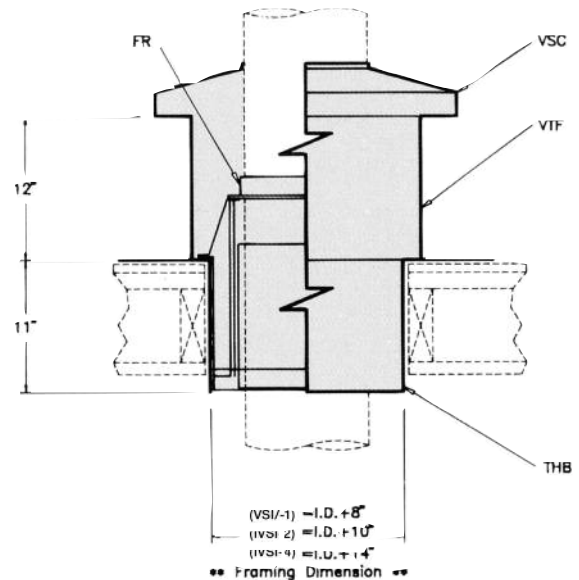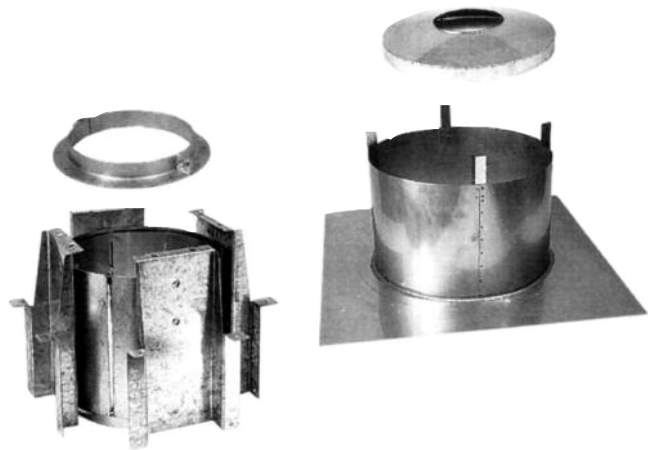

Materials Available:

ALZ or Galv

304

316

Ordered Part Includes:

One THB, one FR, one VTF, and one VSC.


Notes:

1. Model VSI part used for IVSI-1 applications.

Ventilated Roof Support Assembly

Code: MRS

For use where pipe passes through a combustible roof or structure. Supports the chimney 6" above the roof line which may require an expansion joint (AG or BJ) below the roof.

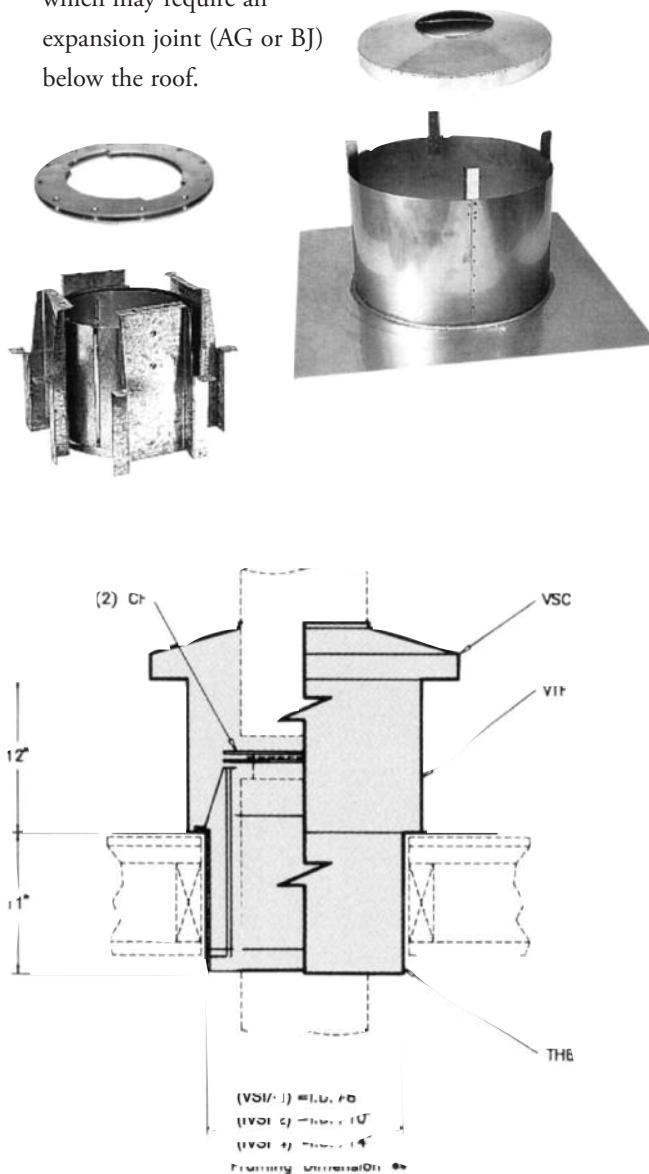

Materials Available:

ALZ or Galv

304

316


Ordered Part Includes:

One THB, two CF's, one VTF, and one VSC.

Pitched Ventilated Roof Thimble

Code: PVT

For use where pipe passes through a combustible pitched roof or structure. Above 24" sizes and steep pitches are not available.

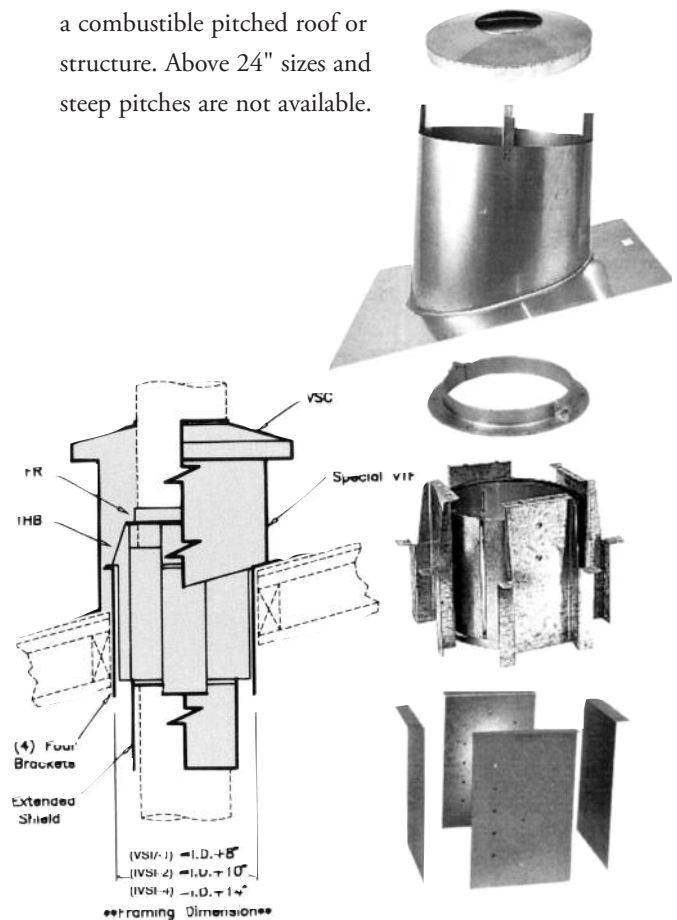

Materials Available:

ALZ or Galv

304

316

Ordered Part Includes:

One THB, 4 brackets, extended shield, special VTF, one FR, and one VSC.



Notes:

1. Does not provide lateral support. An additional FR is required below the roof.
2. May require extra manufacturing time and is non-returnable.
3. Model VSI part used for IVSI-1 applications.

Open Stack Closure Ring

Code: CR

Protects the insulated space between standard pipe inner and outer. Requires a drain at base of stack.

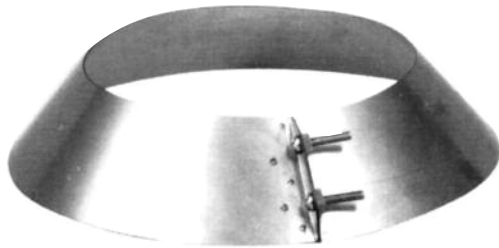

Notes:

Materials Available:

316

Ordered Part Includes:

CR, plus hardware.

Notes:



1. Model VSI part used for IVSI-1 applications.

Product	Dimensions	
	A	B
VSI/-C1	50°	3"
IVSI-C2	32°	3½"
IVSI-C4	17°	5¼"

Stack Cap

Code: SK

Provides partial protection with low flow resistance.
May require a drain at base of stack.

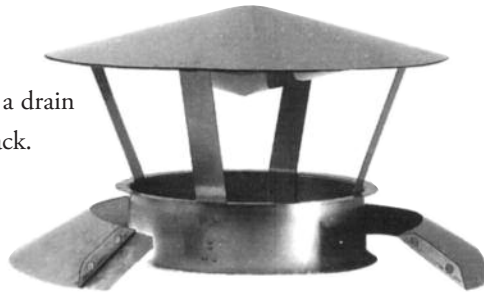

Materials Available:

304 and 316 Stainless Steel

Ordered Part Includes:

SK, plus one CR and one VB.

Notes:


1. Model VSI part used for IVSI-1 applications.
2. $K = 0.5$ Flow Resistance Factor

Product (pipe I. D.)	Dimensions (inches)	
VSI IVSI-C1 IVSI-C2 IVSI-C4	A	B
5	2½	10¼
6	3	10¼
8	4	13¾
10	5	17
12	6	20½
14	7	24
16	8	27¾
18	9	30¾
20	10	34¾
22	11	37¾
24	12	41
26	13	44¾
28	14	47¾
30	15	51¼
32	16	54¾
36	18	61½
42	21	71¼
48	24	82

Insulated Exit Cone

Code: EC

Will increase stack exit velocity 1 1/2 times. Requires a drain at bottom of stack.



Materials Available:

316 Stainless Steel

Ordered Part Includes:

One inner cone, one outer finish collar, and one VB.

Notes:


1. $K = 1.25$ Flow Resistance Factors

O.D.	Product				Dimensions		
	Pipe I. D.				Inches		
	VSI IVSI-C1	IVSI C2	IVSI C4		A	B	C
7	5	—	—		4¾	4	1¾
8/9	6	5	—		4¾	4	1½
10	8	6	—		6¼	4	1¾
12	10	8	—		8¼	4	3¾
14	12	10	6		9¾	4	3¾
16	14	12	8		11½	4	4
18	16	14	10		13¼	6	4¾
20	18	16	12		14¾	6	4¾
22	20	18	14		16¼	6	5
24	22	20	16		18	6	5¼
26	24	22	18		19¾	6	5¾
28	26	24	20		21¼	6	6
30	28	26	22		22¾	8	6¼
32	30	28	24		24½	8	6¾
34	32	30	26		26¾	8	6¾
36	—	32	28		27¾	10	7¼
38	36	—	30		29¾	10	7½
40	—	36	32		31	10	7¾
44	42	—	36		34¼	12	8½
46	—	42	—		36	12	8¾
50	48	—	42		39¼	12	9½
52	—	48	—		—	12	—
56	—	—	48		—	12	—

Flip Top

Code: FL

Termination that prevents moisture and debris from entering system. Flip top opens with internal pressure and closes when pressure is absent.

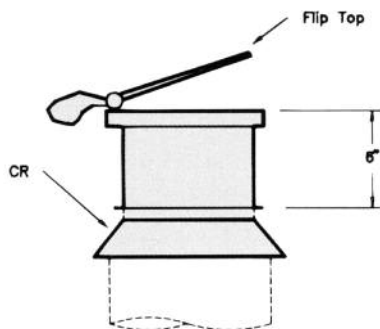

Materials Available:

Cast Aluminum

Ordered Part Includes:

FL connected to a 316 stainless steel TS (6" high), plus one CR, and one VB.



Notes:

1. Available in sizes 5" through 24" only.
2. Model VSI part used for IVSI-1 applications.

Miter Cut

Code: MC

Used primarily for horizontal engine exhaust termination.

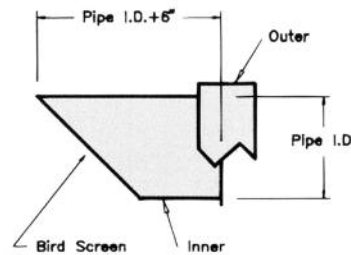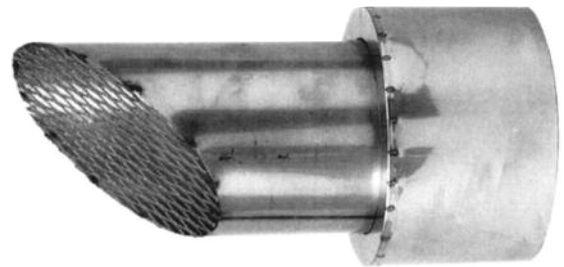

Materials Available:

316 Stainless Steel

Ordered Part Includes:

One inner with bird screen, one outer finish collar, and one VB.


Notes:

1. The 1/2" mesh-pattern bird screen has a 60 percent open area.
2. $K = 1.25$ Flow Resistance Factor

Explosion Relief Valve

Code: ER

For use on all engine exhaust. Helps control the venting pressure should a backfire occur.



Ordered Part Includes:

ER, plus gasket, bolts, washers and nuts for attachment to FD.

Notes:

1. Explosion Relief Valves are recommended in accordance with NFPA 37.
2. Caution must be used in locating valve in an exhaust system. Hot gases and high velocity could cause injury.
3. Number of Snubber Springs, Tension Springs, Support Rods, and Guide Rods vary with valve size.
4. Model VSI part used for all IVSI apps

VSI IVSI-C1 (pipe I.D.)	Dimensions (inches)			No. of Springs
	A	B	C	
5	8 $\frac{3}{8}$	10	10 $\frac{3}{4}$	1
6	9 $\frac{3}{8}$	11	10 $\frac{3}{4}$	1
8	12 $\frac{3}{8}$	13 $\frac{1}{2}$	10 $\frac{3}{4}$	1
10	14	16	10 $\frac{3}{4}$	1
12	16 $\frac{3}{4}$	19	10 $\frac{3}{4}$	2
14	18 $\frac{3}{4}$	21	10 $\frac{3}{4}$	2
16	20 $\frac{3}{4}$	23 $\frac{1}{2}$	10 $\frac{3}{4}$	3
18	22 $\frac{3}{4}$	25	10 $\frac{3}{4}$	3
20	24 $\frac{3}{4}$	27 $\frac{1}{2}$	10 $\frac{3}{4}$	3
22	26 $\frac{3}{4}$	29 $\frac{1}{2}$	10 $\frac{3}{4}$	4
24	28 $\frac{1}{2}$	32	10 $\frac{3}{4}$	4


Guy Section

Code: GS

A rigid, factory-welded section for attaching guys to chimney stack.



(insert photo shows storm collar)

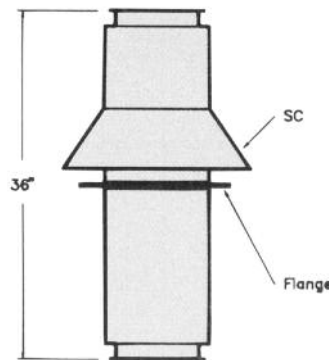

Materials Available:

304/ALZ	316/ALZ	304/304	316/316
---------	---------	---------	---------

Ordered Part Includes:

Welded pipe section with flange and storm collar, one CB, and one VB.


Notes:

1. Flange has 13/16" diameter holes, 30" apart.
2. Flow Resistance Factor (K) is the same as insulated pipe.

Guy Tensioner

Code: GT

Used with GS to allow the stack to expand without stretching the guy wire or buckling the stack.

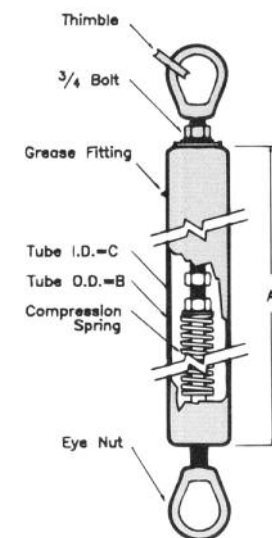









Notes:

1. Available in four tension capacities as shown below.
2. Guy calculations available upon request.

Dimensions (inches)				
Tension Capacity (lb.)	1050	1350	2100	2700
Tube Length - A	24	38	24	38
Tube O. D.	1 $\frac{3}{8}$	2 $\frac{3}{8}$	1 $\frac{3}{8}$	2 $\frac{3}{8}$
Tube I. D.	1 $\frac{1}{16}$	2 $\frac{1}{16}$	1 $\frac{1}{16}$	2 $\frac{1}{16}$
Maximum Compression Travel	3	3	3	3
Weight (lb.)	15	25	22	37

Several special parts, such as those shown here, are available upon request.

Please provide detail of the required part if not already designed by AMPCO and allow extra manufacturing time. Special parts are non-returnable.

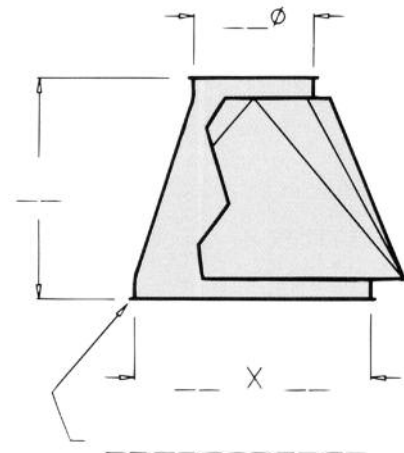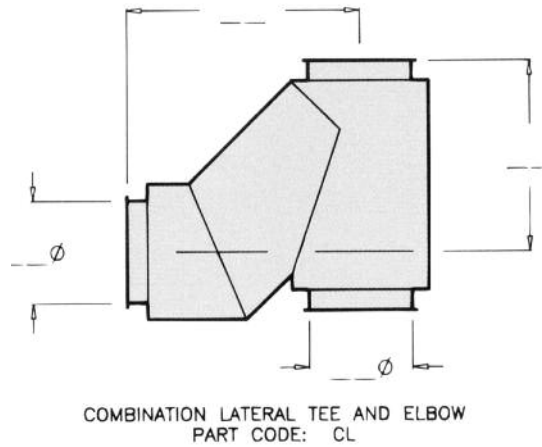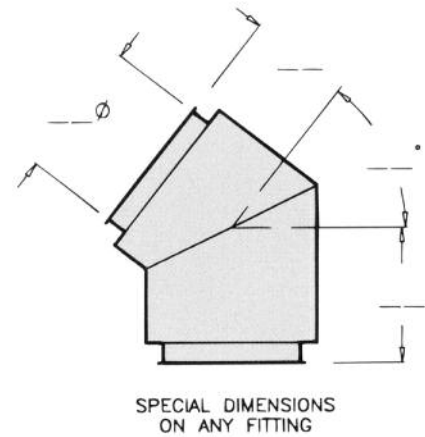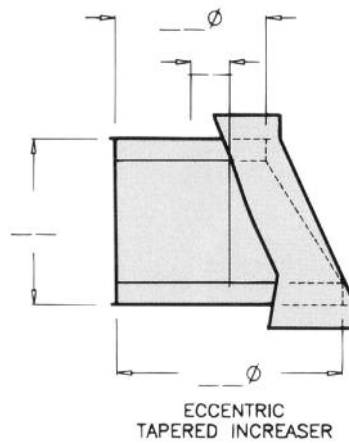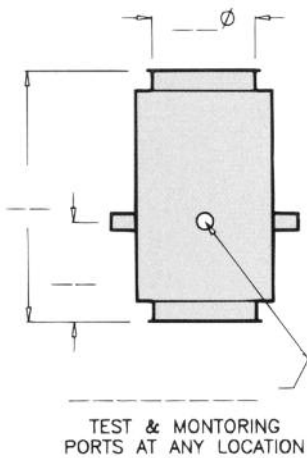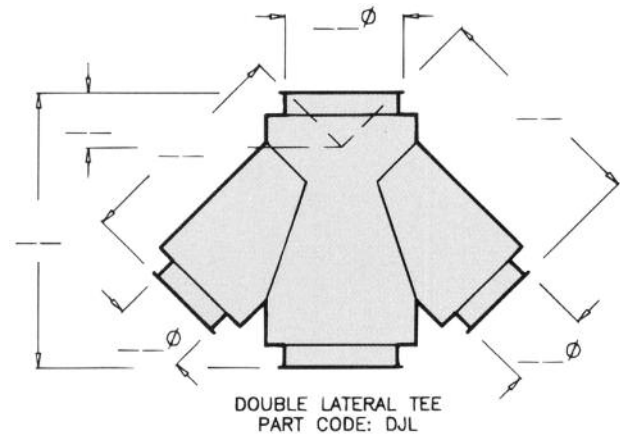

PROVIDE PRECISE DETAIL
OF EXISTING PIPE OR
FLANGE FOR ATTACHMENT

SINGLE WALL PART CODE: ☐ SWA
DOUBLE WALL PART CODE: ☐ DWA

PRODUCT WEIGHT (Lbs.)

(for shipping weight add 20% to product weight)

PART	5" Chimney				6" Chimney				8" Chimney				10" Chimney				12" Chimney				14" Chimney			
	Code	VSI	-C1	-C2 -C4	Code	VSI	-C1	-C2 -C4	Code	VSI	-C1	-C2 -C4	Code	VSI	-C1	-C2 -C4	Code	VSI	-C1	-C2 -C4	Code	VSI	-C1	-C2 -C4
Double Wall Pipe																								
60" Length	60	-	-	- -	60	-	-	- -	60	32	39	46 60	60	43	52	62 81	60	51	62	73 96	60	57	70	82
42" Length	42	-	-	- -	42	17	21	24 32	42	23	28	33 43	42	31	38	45 59	42	36	44	52 68	42	40	49	58 76
30" Length	30	10	12	14 19	30	12	15	17 23	30	16	20	23 30	30	20	24	29 38	30	24	29	35 45	30	26	35	37 49
18" Length	18	6	7	9 11	18	7	9	10 13	18	9	11	13 17	18	12	15	17 23	18	15	18	22 28	18	17	21	24 32
Adjustable/Variable Pipe																								
30" Adjustable Pipe	AG30	13	16	19 25	AG30	16	20	23 30	AG30	20	24	29 38	AG30	25	31	36 47	AG30	29	35	42 55	AG30	33	40	48 62
18" Adjustable Pipe	AG18	7	9	10 13	AG18	11	13	16 21	AG18	13	16	19 25	AG18	16	20	23 30	AG18	20	24	29 38	AG18	22	27	32 42
Lined Bellows Joint	BJ	12	15	17 23	BJ	9	11	13 17	BJ	11	13	16 21	BJ	16	20	23 30	BJ	20	24	29 38	BJ	15	18	22 28
30" Variable Pipe	VL30	13	16	19 25	VL30	16	20	23 30	VL30	20	24	29 38	VL30	25	31	36 47	VL30	29	35	42 55	VL30	33	40	48 62
18" Variable Pipe	VL18	7	9	10 13	VL18	11	13	16 21	VL18	13	16	19 25	VL18	16	20	23 30	VL18	20	24	29 38	VL18	22	27	32 42
Double Wall Fittings																								
90° Tee	MT	6	7	9 11	MT	7	9	10 13	MT	10	12	14 19	MT	14	17	20 26	MT	18	22	26 34	MT	23	28	33 43
90° Tee -Grease	GMT	7	9	10 13	GMT	8	10	12 15	GMT	12	15	17 23	GMT	17	21	24 32	GMT	21	26	30 40	GMT	28	34	40 53
45° Tee Lateral	JL	10	12	14 19	JL	12	15	17 23	JL	17	21	24 32	JL	23	28	33 43	JL	31	38	45 59	JL	40	49	58 76
90° Wye	JY	5	6	7 9	JY	6	7	9 11	JY	8	10	12 15	JY	18	22	26 34	JY	20	24	29 38	JY	28	34	40 53
Drain Tee Cap	TC	1	1	1 2	TC	1	1	1 2	TC	2	2	3 4	TC	3	4	4 6	TC	3	4	4 6	TC	5	6	7 9
Cleanout Tee Cap	TCN	1	1	1 2	TCN	1	1	1 2	TCN	2	2	3 4	TCN	3	4	4 6	TCN	3	4	4 6	TCN	5	6	7 9
15° Elbow	EL15	8	10	12 15	EL15	9	11	13 17	EL15	10	12	14 19	EL15	13	16	19 25	EL15	16	20	23 30	EL15	16	20	23 30
30° Elbow	EL30	4	5	6 8	EL30	5	6	7 9	EL30	7	9	10 13	EL30	10	12	14 19	EL30	13	16	19 25	EL30	15	18	22 28
45° Elbow	EL45	6	7	9 11	EL45	7	9	10 13	EL45	10	12	14 19	EL45	13	16	19 25	EL45	17	21	24 32	EL45	20	24	29 38
90° Elbow	EL90	8	10	12 15	EL90	10	12	14 19	EL90	15	18	22 28	EL90	20	24	29 38	EL90	26	32	37 49	EL90	30	37	43 57
Tapered Inc. (2step)	OT	6	7	8 11	OT	7	9	10 13	OT	9	11	13 17	OT	10	12	14 19	OT	12	15	17 23	OT	16	20	23 30
Step Increaser (1Step)	OS	3	4	4 6	OS	4	5	6 8	OS	5	6	7 9	OS	10	12	14 19	OS	13	16	19 25	OS	13	16	19 25
Drain Section	DS	5	6	7 9	DS	5	6	7 9	DS	7	9	10 13	DS	8	10	12 15	DS	10	12	14 19	DS	11	13	16 21
Support/Guide Assem.																								
Half Angle Ring	HR	2	2	3 3	HR	3	3	3 4	HR	3	3	4 4	HR	4	4	4 5	HR	4	4	5 6	HR	5	5	6 7
Full Angle Ring	FR	4	4	5 6	FR	5	5	6 6	FR	6	6	6 8	FR	6	6	8 9	FR	8	8	9 12	FR	9	9	12 13
Plate Support Assem.	PA	7	7	9 11	PA	9	9	11 15	PA	11	11	15 16	PA	15	15	16 19	PA	16	16	19 23	PA	19	19	23 25
Wall Support Assem.	WA	17	17	20 23	WA	20	20	23 27	WA	23	23	27 28	WA	27	27	28 31	WA	28	28	31 34	WA	31	31	34 38
Wall Guide Assembly	WG	17	17	21 23	WG	21	21	23 26	WG	23	23	26 27	WG	26	26	27 29	WG	27	27	29 32	WG	29	29	32 67
Floor Guide Assembly	FG	8	8	10 12	FG	10	10	12 13	FG	12	12	13 14	FG	13	13	14 18	FG	14	14	18 18	FG	18	18	18 21
Connection Accessories																								
Boiler Kit	BK	2	2	2 2	BK	2	2	2 2	BK	2	2	2 2	BK	2	2	2 2	BK	2	2	2 2	BK	2	2	2 2
Seal Ring	SR	1	1	1 1	SR	1	1	1 1	SR	2	2	2 2	SR	2	2	2 2	SR	2	2	2 2	SR	1	1	1 1
Flange Adapter	FD	5	6	7 9	FD	8	10	11 15	FD	10	12	14 19	FD	14	17	20 26	FD	22	27	32 42	FD	21	26	30 40
Clamp Flange	CF	2	2	3 4	CF	3	3	4 6	CF	4	4	6 6	CF	6	6	6 7	CF	6	6	7 8	CF	7	7	8 9
Flanged Hood Trans.	TS	1	1	1 2	TS	1	1	1 2	TS	2	2	3 4	TS	2	2	3 4	TS	2	2	3 4	TS	2	2	3 4
Unflanged Hood Trans	TSU	1	1	1 2	TSU	1	1	1 2	TSU	2	2	3 4	TSU	2	2	3 4	TSU	2	2	3 4	TSU	2	2	3 4
Fan Adapter	FA	4	5	6 8	FA	5	6	7 9	FA	7	9	10 13	FA	12	15	17 23	FA	15	18	22 28	FA	18	22	26 34
Roof Penetrations																								
Storm Collar	SC	2	2	3 3	SC	3	6	3 3	SC	3	3	3 4	SC	3	3	4 4	SC	4	4	4 5	SC	4	4	5 5
Tall Flashing	TF	5	5	6 7	TF	6	6	7 8	TF	7	7	8 9	TF	8	8	9 10	TF	9	9	10 11	TF	10	10	11 12
Pitched Tall Flashing	PTF	6	6	7 8	PTF	7	7	8 9	PTF	8	8	9 10	PTF	9	9	10 11	PTF	10	10	11 12	PTF	11	11	12 13
Ventilated Thimble	THB	17	17	17 18	THB	17	10	18 25	THB	18	18	25 27	THB	25	25	27 30	THB	27	27	30 32	THB	30	30	32 34
Ventilated Tall Flash	VTF	10	10	10 13	VTF	10	10	13 15	VTF	13	13	15 16	VTF	15	15	16 16	VTF	16	16	16 16	VTF	16	16	16 18
Vent. Storm Collar	VSC	3	3	5 5	VSC	5	5	5 5	VSC	5	5	5 6	VSC	5	5	6 6	VSC	6	6	6 8	VSC	6	6	8 8
Vent. Thimble Assem.	MVT	37	37	37 39	MVT	37	37	39 51	MVT	39	39	51 57	MVT	51	51	57 59	MVT	57	57	59 65	MVT	59	59	65 72
Vent. Support Assem.	MRS	37	37	37 39	MRS	37	37	39 51	MRS	39	39	51 57	MRS	51	51	57 59	MRS	57	57	59 65	MRS	59	59	65 72
Pitch. Thimble Assem.	PVT	41	41	41 43	PVT	41	41	43 56	PVT	43	43	56 63	PVT	56	51	63 65	PVT	63	63	65 72	PVT	65	65	72 79
Terminations																								
Closure Ring	CR	1	1	1 1	CR	1	1	1 2	CR	1	1	2 3	CR	2	2	3 3	CR	3	3	3 3	CR	3	3	3 3
Chimney Top	CT	3	-	- -	CT	3	-	- -	CT	5	-	- -	CT	8	-	- -	CT	12	-	- -	CT	18	-	- -
Stack Cap	SK	4	4	4 4	SK	4	4	4 4	SK	6	6	6 6	SK	9	9	9 9	SK	12	12	12 12	SK	15	15	15 15
Exit Cone	EC	1	1	1 2	EC	2	2	3 4	EC	4	6	6 8	EC	5	6	7 9	EC	9	11	13 17	EC	7	9	10 13
Flip Top	FL	3	3	3 3	FL	3	3	3 3	FL	8	8	8 8	FL	10	10	10 10	FL	12	12	12 12	FL	14	14	14 14
Miter Cut	MC	6	6	6 6	MC	6	6	6 6	MC	7	7	7 7	MC	8	8	8 8	MC	9	9	9 9	MC	12	12	12 12
Miscellaneous																								
Guy Section	GS	16	20	23 30	GS	20	24	29 38	GS	25	31	36 47	GS	33	40	48 62	GS	40	49	58 76	GS	45	55	65 85
Explosion Relief Valve	ER	25	-	- -	ER	30	-	- -	ER	45	-	- -	ER	55	-	- -	ER	90	-	- -	ER	105	-	- -
Vee Band	VB	1	1	1 1	VB	1	1	1 1	VB	1	1	1 .1	VB	1	1	1 1	VB	1	1	1 1	VB	1	1	1 1
Overlapping Vee Band	OBV	1	1	1 1	OBV	1	1	1 1	OBV	1	1	1 1	OBV	1	1	1 1	OBV	1	1	1 1	OBV	1	1	1 1
Channel Band	CB	1	1	1 1	CB	1	1	1 1	CB	1	1	1 1	CB	1	1	1 1	CB	1	1	1 1	CB	1	1	1 2
Half Channel Band	HCB	1	1	1 1	HCB	1	1	1 1	HCB	1	1	1 1	HCB	1	1	1 1	HCB	1	1	1 1	HCB	1	1	1 2

PRODUCT WEIGHT (Lbs.)

(for shipping weight add 20% to product weight)

PART	16" Chimney					18" Chimney					20" Chimney					22" Chimney					24" Chimney					26" Chimney				
	Code	VSI	-1	-2	-4	Code	VSI	-1	-2	-4	Code	VSI	-1	-2	-4	Code	VSI	-1	-2	-4	Code	VSI	-1	-2	-4	Code	VSI	-1	-2	-4
Double Wall Pipe																														
60" Length	60	-	-	-	-	60	-	-	-	-	60	-	-	-	-	60	-	-	-	-	60	-	-	-	-	60	-	-	-	-
42" Length	42	46	56	66	87	42	51	62	73	96	42	57	70	82	108	42	62	76	89	117	42	67	82	96	127	42	73	89	105	-
30" Length	30	30	37	43	57	30	34	41	49	64	30	36	44	52	68	30	39	48	56	74	30	42	51	60	79	30	46	56	66	87
18" Length	18	18	22	26	34	18	20	24	29	38	18	24	29	35	45	18	26	32	37	49	18	27	33	39	51	18	30	37	43	57
Adj./Variable Pipe																														
30" Adjustable Pipe	AG30	36	44	52	68	AG30	40	49	58	76	AG30	44	54	63	83	AG30	51	62	73	96	AG30	53	65	76	100	AG30	56	68	81	106
18" Adjustable Pipe	AG18	24	29	35	45	AG18	26	32	37	49	AG18	29	35	42	55	AG18	33	40	48	62	AG18	36	44	52	68	AG18	38	46	55	72
Lined Bellows Joint	BJ	17	21	24	32	BJ	19	23	27	36	BJ	21	26	30	40	BJ	24	29	35	45	BJ	26	32	37	49	BJ	-	-	-	-
30" Variable Pipe	VL30	36	44	52	68	VL30	40	49	58	76	VL30	40	54	63	83	VL30	51	62	73	96	VL30	53	65	76	100	VL30	56	68	81	106
18" Variable Pipe	VL18	24	29	35	45	VL18	26	32	37	49	VL18	29	35	42	55	VL18	33	40	48	62	VL18	36	44	52	68	VL18	38	46	55	72
Double Wall Fittings																														
90° Tee	MT	26	32	37	49	MT	32	39	46	60	MT	36	44	52	68	MT	49	60	71	93	MT	52	63	75	98	MT	62	76	89	117
90° Tee -Grease	GMT	33	40	48	62	GMT	40	49	58	76	GMT	46	56	66	87	GMT	60	73	86	113	GMT	64	78	92	121	GMT	75	92	108	142
45° Tee Lateral	JL	58	71	84	110	JL	63	77	91	119	JL	68	83	98	129	JL	79	96	114	149	JL	89	109	128	168	JL	112	137	161	212
90° Wye	JY	33	40	48	60	JY	43	52	62	81	JY	52	63	75	98	JY	62	76	89	117	JY	72	88	104	136	JY	82	100	118	155
Drain Tee Cap	TC	7	9	10	13	TC	8	10	12	15	TC	10	12	14	19	TC	11	13	16	21	TC	12	15	17	23	TC	13	16	19	25
Cleanout Tee Cap	TCN	7	9	10	13	TCN	8	10	12	15	TCN	10	12	14	19	TCN	11	13	16	21	TCN	12	15	17	23	TCN	13	16	19	25
15° Elbow	EL15	18	22	26	34	EL15	23	28	33	43	EL15	26	32	37	49	EL15	29	35	42	55	EL15	32	39	46	60	EL15	37	45	53	70
30° Elbow	EL30	17	21	24	32	EL30	20	24	29	38	EL30	28	34	40	53	EL30	32	39	46	60	EL30	33	40	48	62	EL30	38	46	55	72
45° Elbow	EL45	25	31	36	47	EL45	26	32	37	49	EL45	31	38	45	59	EL45	42	51	60	79	EL45	41	51	60	79	EL45	50	61	72	95
90° Elbow	EL90	38	46	55	72	EL90	39	48	56	74	EL90	47	57	68	89	EL90	54	66	78	102	EL90	63	77	91	119	EL90	75	92	108	142
Tap. Increas. (2 Step)	OT	16	20	23	30	OT	26	32	37	49	OT	32	39	46	60	OT	38	46	55	72	OT	43	53	62	81	OT	48	59	69	91
Step Increas. (1 Step)	OS	14	17	20	26	OS	16	20	23	30	OS	18	22	26	34	OS	44	54	63	83	OS	19	23	27	34	OS	20	24	29	38
Drain Section	DS	13	16	19	25	DS	13	16	19	25	DS	16	20	23	30	DS	17	21	24	32	DS	18	22	26	34	DS	20	24	29	38
Support/Guide Access																														
Half Angle Ring	HR	6	6	7	7	HR	7	7	7	8	HR	7	7	8	9	HR	8	8	9	9	HR	9	9	9	9	HR	9	9	9	9
Full Angle Ring	FR	12	12	13	14	FR	13	13	14	16	FR	14	14	16	18	FR	16	16	18	18	FR	18	18	18	18	FR	18	18	18	19
Plate Support Asbly	PA	23	23	25	28	PA	25	25	28	31	PA	28	28	31	35	PA	31	31	35	40	PA	35	35	40	42	PA	40	40	42	43
Wall Support Asbly	WA	34	34	38	41	WA	38	38	41	43	WA	41	41	43	45	WA	43	43	45	46	WA	45	45	46	48	WA	46	46	48	51
Wall Guide Asbly	WG	32	32	37	38	WG	37	37	38	38	WG	38	38	38	38	WG	38	38	38	38	WG	38	38	38	38	WG	38	38	39	39
Floor Guide Asbly	FG	18	18	21	23	FG	21	21	23	25	FG	23	25	25	28											FG	28	28	28	30
Connection Acces.																														
Boiler Kit	BK	2	2	2	2	BK	2	2	2	2	BK	2	2	2	2	BK	2	2	2	2	BK	2	2	2	2	BK	2	2	2	2
Seal Ring	SR	1	1	1	1	SR	4	4	4	4	SR	4	4	4	4	SR	4	4	4	4	SR	5	5	5	5	SR	5	5	5	5
Flange Adapter	FD	26	32	37	49	FD	34	41	49	64	FD	32	39	46	60	FD	38	46	55	72	FD	43	52	62	81	FD	47	57	68	89
Clamp Flange	CF	8	8	9	9	CF	9	9	9	10	CF	9	9	10	10	CF	10	10	10	11	CF	10	10	11	11	CF	11	11	11	11
Flanged HoodTran.	TS	2	2	3	4	TS	4	5	6	8	TS	4	5	6	8	TS	4	5	6	8	TS	5	6	7	9	TS	5	6	7	9
Unflan. Hood Tran	TSU	2	2	3	4	TSU	4	5	6	8	TSU	4	5	6	8	TSU	4	5	6	8	TSU	5	6	7	9	TSU	5	6	7	9
Fan Adapter	FA	21	26	30	40	FA	25	31	36	47	FA	31	38	45	59	FA	36	44	52	68	FA	40	49	58	76	FA	46	56	66	87
Roof Penetrations																														
Storm Collar	SC	5	5	5	5	SC	5	5	5	6	SC	5	5	6	6	SC	6	6	6	7	SC	6	6	7	7	SC	7	7	7	8
Tall Flashing	TF	11	11	12	13	TF	12	12	13	16	TF	13	13	16	19	TF	16	16	19	21	TF	19	19	21	22	TF	21	21	22	23
Pitched Tall Flashing	PTF	12	12	13	14	PTF	13	13	14	18	PTF	14	14	18	20	PTF	18	18	20	22	PTF	20	20	22	24	PTF	22	22	24	25
Ventilated Thimble	THB	32	32	34	36	THB	34	34	36	38	THB	36	36	38	40	THB	38	38	40	41	THB	40	40	41	42	THB	41	41	42	44
Ventilated Tall Flash	VTF	16	16	18	18	VTF	18	18	18	20	VTF	18	18	20	20	VTF	20	20	22	26	VTF	22	22	26	28	VTF	26	26	28	30
Vent. Storm Collar	VSC	8	8	8	8	VSC	8	8	8	9	VSC	8	8	9	9	VSC	9	9	9	11	VSC	9	9	11	11	VSC	11	11		

PRODUCT WEIGHT (Lbs.)

(for shipping weight add 20% to product weight)


PART	28" Chimney					30" Chimney					32" Chimney					36" Chimney					42" Chimney					48" Chimney				
	Code	VSI	-1	-2	-4	Code	VSI	-1	-2	-4	Code	VSI	-1	-2	-4	Code	VSI	-1	-2	-4	Code	VSI	-1	-2	-4	Code	VSI	-1	-2	-4
Double Wall Pipe																														
60" Length	60	-	-	-	-	60	-	-	-	-	60	-	-	-	-	60	-	-	-	-	60	-	-	-	-	60	-	-	-	-
42" Length	42	78	95	112	-	42	84	102	-	-	42	90	110	-	-	42	-	-	-	-	42	-	-	-	-	42	-	-	-	-
30" Length	30	49	60	71	93	30	53	65	76	100	30	56	68	81	106	30	62	76	89	117	30	86	105	124	163	30	98	120	141	185
18" Length	18	32	39	46	60	18	34	41	49	64	18	35	43	50	66	18	39	48	56	74	18	67	82	96	127	18	76	93	109	144
Adj./Variable Pipe																														
30" Adjustable Pipe	AG30	58	71	84	110	AG30	59	72	85	112	AG30	60	73	86	113	AG30	69	84	99	130	AG30	109	133	157	206	AG30	125	153	180	236
18" Adjustable Pipe	AG18	-	-	-	-	AG18	-	-	-	-	AG18	-	-	-	-	AG18	-	-	-	-	AG18	-	-	-	-	AG18	-	-	-	-
Lined Bellows Joint	BJ	12	15	17	23	BJ	-	-	-	-	BJ	-	-	-	-	BJ	-	-	-	-	BJ	-	-	-	-	BJ	-	-	-	-
30" Variable Pipe	VL30	58	71	84	110	VL30	59	72	85	112	VL30	60	73	86	113	VL30	69	84	99	130	VL30	109	133	157	206	VL30	125	153	180	236
18" Variable Pipe	VL18	40	49	58	76	VL18	44	54	63	83	VL18	48	59	69	91	VL18	56	68	81	106	VL18	78	95	112	147	VL18	89	109	128	168
Double Wall Fittings																														
90° Tee	MT	71	87	102	134	MT	81	99	117	153	MT	90	110	130	170	MT	109	133	157	206	MT	142	173	204	268	MT	220	268	317	416
90° Tee -Grease	GMT	87	106	125	164	GMT	99	121	143	187	GMT	109	133	157	206	GMT	131	160	189	248	GMT	171	209	246	323	GMT	256	312	369	484
45° Tee Lateral	JL	135	165	194	255	JL	151	184	217	285	JL	167	204	240	316	JL	208	254	300	393	JL	248	303	357	469	JL	280	342	403	529
90° Wye	JY	91	111	131	172	JY	98	120	141	185	JY	104	127	150	197	JY	130	159	187	246	JY	162	198	233	306	JY	194	237	279	367
Drain Tee Cap	TC	16	20	23	30	TC	18	22	26	34	TC	19	23	27	36	TC	22	27	32	42	TC	29	35	42	55	TC	36	44	52	68
Cleanout Tee Cap	TCN	16	20	23	30	TCN	18	22	26	34	TCN	19	23	27	36	TCN	22	27	32	42	TCN	29	35	42	55	TCN	36	44	52	68
15° Elbow	EL15	42	51	60	79	EL15	45	55	65	85	EL15	49	60	71	93	EL15	55	67	79	104	EL15	70	85	101	132	EL15	83	101	120	157
30° Elbow	EL30	42	51	60	79	EL30	45	55	65	85	EL30	50	61	72	95	EL30	58	71	84	110	EL30	74	90	107	140	EL30	88	107	127	166
45° Elbow	EL45	57	70	82	108	EL45	61	74	88	115	EL45	65	79	94	123	EL45	80	98	115	151	EL45	101	123	145	191	EL45	121	148	174	229
90° Elbow	EL90	86	105	124	163	EL90	91	111	131	172	EL90	96	117	138	181	EL90	120	146	173	227	EL90	152	185	219	287	EL90	182	222	262	344
Tap. Increas (2 Step)	OT	53	65	76	100	OT	57	70	82	108	OT	60	73	86	113	OT	88	108	127	166	OT	100	122	144	189	OT	-	-	-	-
Step Increas (1 Step)	OS	28	34	40	53	OS	35	43	50	66	OS	42	51	60	79	OS	60	73	86	113	OS	75	92	108	142	OS	90	110	130	170
Drain Section	DS	21	26	30	40	DS	23	28	33	43	DS	25	31	36	47	DS	25	31	36	47	DS	42	51	60	79	DS	48	59	69	91
Support/Guide Acces.																														
Half Angle Ring	HR	9	9	9	10	HR	9	9	10	10	HR	10	10	10	13	HR	10	10	13	14	HR	13	13	14	25	HR	14	14	20	26
Full Angle Ring	FR	18	18	19	19	FR	19	19	19	21	FR	19	19	21	26	FR	21	21	26	29	FR	26	26	29	49	FR	29	29	42	55
Plate Support Assem.	PA	42	42	43	46	PA	43	43	46	54	PA	46	46	54	67	PA	54	54	67	81	PA	67	67	81	127	PA	81	81	117	153
Wall Support Assem.	WA	48	48	51	54	WA	51	51	54	58	WA	54	54	58	74	WA	58	58	74	88	WA	74	74	88	140	WA	88	88	127	166
Wall Guide Assem.	WG	39	39	39	40	WG	39	39	40	43	WG	40	40	43	54	WG	43	43	54	65	WG	54	54	65	102	WG	65	65	94	123
Floor Guide Assem.											FG	31	31	34	42	FG	34	34	42	50	FA	42	42	50	79	FG	50	50	72	95
Connection Access.																														
Boiler Kit	BK	2	2	2	2	BK	2	2	2	2	BK	2	2	2	2	BK	2	2	2	2	BK	2	2	2	2	BK	2	2	2	2
Seal Ring	SR	6	6	6	6	SR	6	6	6	6	SR	7	7	7	7	SR	9	9	9	9	SR	12	12	12	12	SR	14	14	14	14
Flange Adapter	FD	50	61	72	95	FD	59	72	85	112	FD	68	83	98	129	FD	77	94	111	146	FD	86	105	124	163	FD	102	124	147	193
Clamp Flange	CF	11	11	11	12	CF	11	11	12	14	CF	12	12	14	16	CF	14	14	16	19	CF	16	16	19	30	CF	19	19	27	36
Flanged HoodTran.	TS	6	7	9	11	TS	6	7	9	11	TS	7	9	10	13	TS	9	11	13	17	TS	12	15	17	23	TS	14	17	20	26
Unflang. Hood Tran	TSU	6	7	9	11	TSU	6	7	9	11	TSU	7	9	10	13	TSU	9	11	13	17	TSU	12	15	17	23	TSU	14	17	20	26
Fan Adapter	FA	48	59	69	91	FA	55	67	79	104	FA	65	79	94	123	FA	74	90	107	140	FA	83	101	120	157	FA	99	121	143	187
Roof Penetrations																														
Storm Collar	SC	7	7	8	8	SC	8	8	8	9	SC	8	8	9	10	SC	9	9	10	13	SC	10	10	13	19	SC	13	13	19	25
Tall Flashing	TF	22	22	23	25	TF	23	23	25	26	TF	25	25	26	33	TF	26	26	33	34	TF	33	33	34	62	TF	34	34	49	64
Pitched Tall Flashing	PTF	24	24	25	27	PTF	25	25	27	29	PTF	27	27	29	36	PTF	29	29	36	37	PTF	36	36	37	68	PTF	37	37	53	70
Ventilated Thimble	THB	42	42	44	48	THB	44	44	48	54	THB	48	48	54	64	THB	54	54	64	83	THB	64	64	83	121	THB	83	83	120	157
Vent. Tall Flashing	VTF	28	28	30	32	VTF	30	30	32	34	VTF	32	32	34	42	VTF	34	34	42	45	VTF	42	42	45	79	VTF	45	45	65	85
Vent. Storm Collar	VSC	11	11	12	12	VSC	12	12	12	13	VSC	12	12	13	14	VSC	13	13	14	16	VSC	14	14	16	26	VSC	16	16	23	30
Vent. Thim. Assem.	MVT	96	96	100	102	MVT	100	100	102	122	MVT	102	102	122	146	MVT	122	122	146	173	MVT	146	146	173	276	MVT	173	173	249	327
Vent. Supp. Assem.	MRS	96	96	100	102	MRS	100	100	102	122	MRS	102	102	122	146	MRS	122	122	146	173	MRS	146	146	173	276	MRS	173	173	249	327
Pitch ThimAssembly	PVT	-	-	-	-	PVT	-	-	-	-	PVT	-	-	-	-	PVT	-	-	-	-	PVT	-	-	-	-	PVT	-	-	-	-
Terminations																														
Closure Ring	CR	3	3	4	4	CR	4	4	4	4	CR	4	4	4	6	CR	4	4	6	7	CR	6	6	7	11	CR	7	7	10	13
Chimney Top	CT	-	-	-	-	CT	-	-	-	-	CT	-	-	-	-	CT	-	-	-	-	CT	-	-	-	-	CT	-	-	-	-
Stack Cap	SK	50	50	50	50	SK	55	55	55	55	SK	59	59	59	59	SK	67	67	67	67	SK	84	84	84	84	SK	101	101	101	101
Exit Cone	EC	34	41	49	64	EC	41	50	59	77	EC	47	57	68	89	EC	62	76	89	117	EC	78	95	112	147	EC	93	113	134	176
Flip Top	FL	-	-	-	-	FL	-	-	-	-	FL	-	-	-	-	FL	-	-	-	-	FL	-	-	-	-	FL	-	-	-	-
Miter Cut	MC	30	30	30	30	MC	34	34	34	34	MC	41	41	41	41	MC	50	50	50	50	MC	80	80	80	80	MC	98	98	98	98
Miscellaneous																														
Guy Section	GS	82	100	118	155	GS	81	106	125	164	GS	90	110	130	170	GS	101	123	145	191	GS	160	195	230	302	GS	184			

Material Thickness - Model VSI

Air Space	Size	Inner		Outer	
		Gauge*	Material	Gauge*	Material
1"	5" - 32"	20	.035" - 304 SS	24	.025" Alum Steel
		20	or .035" - 316 SS	24	or 304 & 316 SS
1"	36"	20	.035" - 304 SS	21	.034" Alum Steel
		20	or .035" - 316 SS	20	or .035" 304 & 316 SS
1"	42" - 48"	18	.048" - 304 SS	21	.034" Alum Steel
		18	or .048" - 304 & 316 SS	20	or .035" 304 & 316 SS

* Gauge is approximate.

Approximate Outer Pipe Surface Temperatures

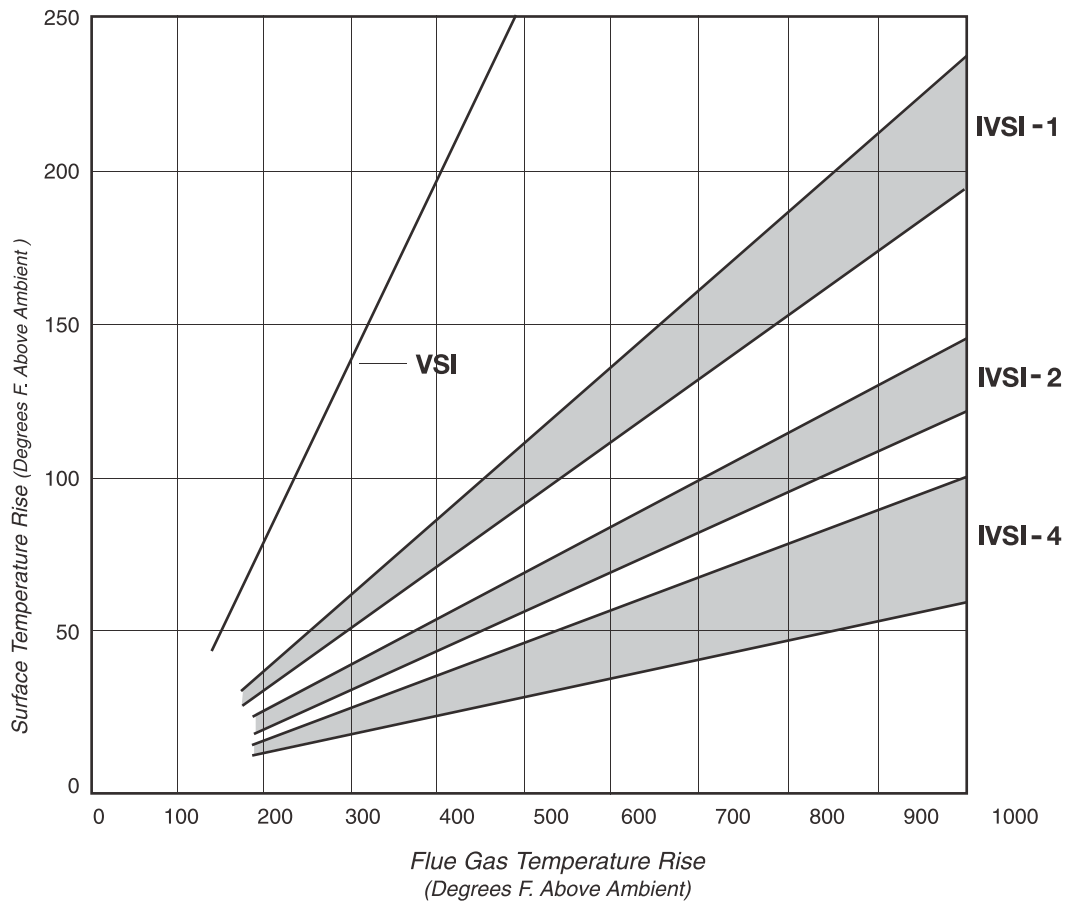

Operating Temperatures and Clearances

Criteria	Type L Vent	Restaurant Grease Duct	Building Heating Appliance Chimney*	1400° F. Factory-Built Chimney
Application	Chimneys and stacks for appliances listed suitable for venting with Type L or Type B venting systems.	Cooking Appliances Ventilation Hoods Restaurant Grease Ducts Pizza Oven Exhausts	Low and High Pressure Steam Boilers Diesel and Turbine Exhausts Building Heating Equipment	Industrial Furnaces Processing Equipment Kilns and Ovens Diesel and Turbine
Maximum Operating Temperatures	550° F Continuous 1700° F. Intermittent	500° F. Continuous 2000° F. Intermittent	1000° F. Continuous 1400° F. Intermittent	1400° F. Continuous 1800° F. Intermittent
Clearances To Combustibles: Model VSI	N.A.	5- 10" I.D. = 5" 12" I.D. = 6" 14" I.D. = 7" 16" I.D. = 8" 18" I.D. = 9" 20" I.D. = 10" Over 20" I. D. = **	5"-16" I.D.= 6" 18"-20" I.D.= 7" 22"-26" I.D.= 8" 28"-30" I.D.= 9" 32"-36" I.D.=10" 42" I.D.=11" 48" I.D.=12"	5"-16" I.D.= 6" 18" I.D.= 8" 20" I.D.= 9" 22" I.D.= 10" 24" I.D.=12" 26" I.D.=13" 28" I.D.=14" 30" I.D.=16" Over 30" I.D. = **
Model IVSI-1	5-24" I.D. = 3"	5-6" I.D. = 2" 8-16" I.D. = 3" 18-24" I.D. = 4" 26-32" I.D. = 5" 36" I.D. = 6" 42-48" I.D. = 7"	5-8" I.D. = 1" 10-16" I.D. = 2" 18-24" I.D. = 3" 26-32" I.D. = 4" 36" I.D. = 5" 42-48" I.D. = 6"	5-6" I.D. = 1" 8-16" I.D. = 2" 18-24" I.D. = 3" 26-32" I.D.= 4" 36" I.D. = 5" 42-48" I.D. = 6"
Models IVSI -2 &-4	5-24" I.D. = 2"	5-16" I.D. = 1" 18-20" I.D. = 2" 22-24" I.D.= 3" 26-32" I.D.= 4" 36" I.D. = 5" 42-48" I.D.= 6"	5-16" I.D. = .5" 18" I.D. = 1" 20" I.D. = 1.5" 22"-24" I.D.= 2" 26"-32" I.D. =3" 36" I.D.= 4" 42"-48" I.D.=5"	5-16" I.D. = .5" 18-24" I.D. = 2" 26-32" I.D. = 3" 36" I.D. = 4" 42-48" I.D. = 5"

*Under the "Building Heating Appliance Chimney" Listing, 5" through 24" Model IVSI have qualified for UL's additional, optional "Type HT" rating for chimneys for certain appliance venting applications; especially solid fuel.

** See Installation Instruction Manual

Hart & Cooley, Inc.'s Commercial Products Group warrants to the original purchaser of this product that the product will be free from defects due to faulty material or workmanship for a period of ten (10) years from date of original purchase, provided the system had been designed and sized by the AMPCO application engineering staff, the operating parameters have been accurately presented to the engineering staff, the entire system is provided by the Commercial Products Group, the product is inspected and found free of damage prior to installation, the system is installed in accordance with the installation instructions provided, and the air is free of solvent and vapors causing condensates.

Hart & Cooley, Inc.'s Commercial Products Group warrants to the original purchaser of this product that the product will be free from defects due to faulty material or workmanship for a period of one (1) year from date of original purchase for installation using generally accepted engineering practices to determine sizes and materials, provided the system is inspected and found to be free of damage prior to installation.

Remedies under the warranty are limited to repairing or replacing, at our option, any product which shall, within the above-stated warranty period, be returned prepaid to Hart & Cooley, Inc..

IN NO EVENT SHALL HART & COOLEY, INC. BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES, EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW. IN NO EVENT SHALL HART & COOLEY, INC. BE LIABLE FOR ANY COSTS OF INSTALLATION, REMOVAL OR REINSTALLATION.

ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THIS PRODUCT IS LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. NO AGENT IS AUTHORIZED TO MAKE ANY MODIFICATIONS TO THIS WARRANTY OR ADDITIONAL WARRANTIES, WHETHER VERBAL OR WRITTEN, BINDING ON HART & COOLEY, INC..

10-Year Limited Warranty Technical Product Information



Your choice of many sizes:

- 5" to 48" diameter
- 10-year limited factory warranty.
- Lowest freight costs.
- Quick ship within 5 working days of order.
- Complete automated factory provides consistent quality at a competitive price.
- AMPCO patented spacers assure consistent product alignment and support.
- Shipped in unique packaging to reduce freight damage. This protects materials until you're ready to install and simplifies on-site handling
- UL/ULC-listed and tested.
- Large network of factory-trained AMPCO representatives.

Toll-free customer assistance.

800-624-8642

WE BUILD TO YOUR DESIGN

Models VSI & IVSI are double-wall UL Listed design, factory engineered and built in sizes up to 48" ID. UL tested for positive pressure 60" WC.



- VSI - IVSI Boiler Breeching
- Chimney Stack
- Engine Exhaust
- VSI - IVSI Grease Duct
- Food Service Venting

AMPCO manufactures engineered solutions for venting today's high-efficiency combustion installations. AMPCO engineered systems are manufactured of high technology materials which resist the highly corrosive effects of combustion exhaust. Traditional methods require time-consuming, labor-intensive installations which consume valuable building space and which later require expensive routine maintenance. Utilizing a system of both standard pre-engineered products with custom-manufactured components, AMPCO engineers a cost-effective venting system which consumes little space and which assembles easily in the field.

A full line of the finest products is yours
from the Commercial Products Group.

HeatFab

Ward Industries

Milcor

Portals Plus

Roof Products & Systems



Commercial Products Group
of Hart & Cooley, Inc.
815 Kimberly Drive • Carol Stream, IL 60188
1.800.624.8642 phone • 1.800.972.1421 fax
www.commercialproductsgroup.com • www.ampcostacks.com