

For heating and cooling, water supply systems, sprinkler/flow irrigation, pressure boosting, municipal water, and heat exchange.

## Wilo BLZ

Block Line Stainless Steel Closed Coupling Pump







## **BLZ**


- → Heating and Cooling
- → Water Supply Systems
- → Sprinkler/Flow Irrigation
- → Pressure Boosting
- → Municipal Water
- → Heat Exchanger





10-21-001-0314

\*Less than 0.25% Lead content

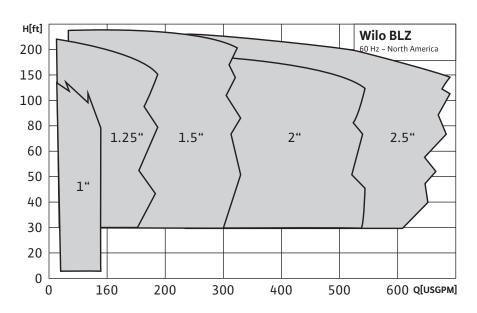

## **Features & Benefits**

- → NSF 61/NSF 372 Certified
- → High quality 304L stainless steel casing, impeller, and shaft
- → Close coupled design that saves space
- → Can be installed horizontally or vertically
- → Top centerline discharge and foot support under casing
- → High operating efficiency which lowers operating costs
- → Temp Range: 212°F (100°C)
- → Max. Working Pressure 230 PSI (15 Bar)
- → Voltage available: 1~ 115/230V, 3~ 208-230/460V
- → Stainless Steel Shaft
  → Max Flow: 900 USGPM
  → Max Head: 290 feet

## **WILO USA LLC**

888-945-6872 www.wilo-usa.com info@wilo-usa.com

WILO Canada Inc.

866-945-6236 www.wilo-canada.com info@wilo-canada.com