



## Atmospheric Non-Dampered Commercial Gas Water Heaters

*Ideal for Large Residences, Apartment Buildings,  
Office Complexes, Dairy Barns, Salons, Barbershops  
and Many Other Facilities*

■ Five-Year Limited Tank/Heat Exchanger Warranty  
– THE INDUSTRY'S FINEST

### ***ezFIT*** Features:

- 76,000 BTU/hr
- 75/100 gallon capacities
- Non-dampered
- 70°F to 180°F settable temperature
- Standing pilot - no electricity required
- Natural gas or propane atmospheric burners
- Glass-fused-to-steel tank interior
- Two magnesium anode rods
- Ecomate® insulation
- Factory installed T&P relief valve
- Brass drain valve
- Optional leg-extensions to raise heater
- 26 to 28-inches wide

### **Turboflue® High Performance Heat Exchanger:**

- Patented helical-fin multi-stage design
- Superior heat conduction  
and fuel efficiency



**Made in the USA**



***ezFIT*** *EASILY REPLACES ANY  
COMPETITIVE HEATER*

*WE TAKE WATER HEATERS PERSONALLY*

This product is available from:

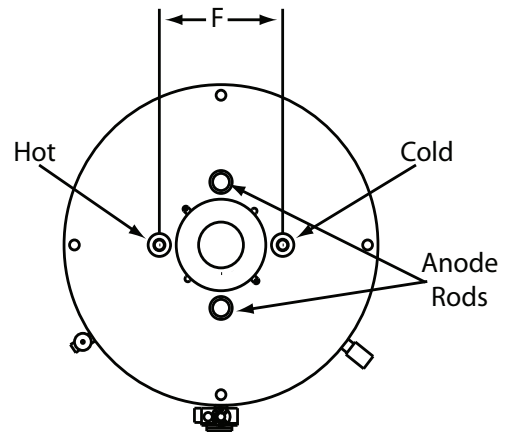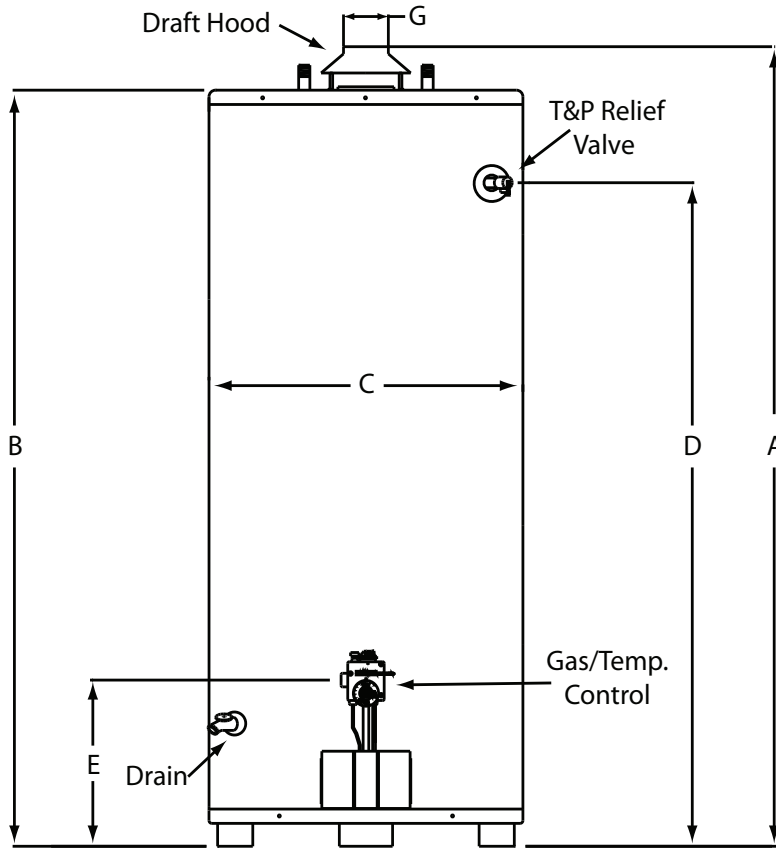

Model	Storage GAL (L)	Rated Input BTU/HR (kW)	Recovery @ 100°F Rise GAL/HR (L/HR)	1st Hr. Del. @ 100°F Rise GAL (L)	Dimensions in Inches (cm)						Inlet Conn. Dia. NPT	Outlet Conn. Dia. NPT	Gas Conn. Dia. NPT	Shipping Weight LBS (kg)	
					A	B	C	D	E	F					G
EZ 75-76N	75 (283.91)	76,000 (22.27)	73 (276.34)	133 (503.50)	69.19 (175.74)	65.38 (166.07)	26.00 (66.04)	58.25 (147.96)	14.50 (36.83)	11.00 (27.94)	4.00 (10.16)	1.00	1.00	0.50	391 (177.35)
EZ 100-76N	100 (379.54)	76,000 (22.27)	73 (276.34)	153 (579.17)	69.81 (177.32)	66.00 (167.64)	28.00 (71.12)	57.94 (147.17)	14.50 (36.83)	11.00 (27.94)	4.00 (10.16)	1.00	1.00	0.50	485 (219.99)

**For LP models change suffix "N" to "LP"**

**Working Pressure:** 150 psi (1034 kPa)

**Test Pressure:** 300 psi (2068 kPa)

For natural gas: manifold pressure = 4" w.c. (1.00 kPa); Inlet pressure range = 5 - 14" w.c. (1.25-3.49 kPa)

For propane gas: manifold pressure = 10" w.c. (2.49 kPa); Inlet pressure range = 11 - 14" w.c. (2.74-3.49 kPa)

**T&P valve factory installed**

All Bock products meet or exceed current ASHRAE standards.

These products are design certified by UL (Underwriters Laboratories) and meet ANSI Z21.10.3/CSA 4.3 requirements for operation up to 180°F (82°C).

Approved for use as an automatic circulating tank water heater or automatic storage water heater.

**Warning:** Do not install on combustible flooring. Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54.

**Caution:** The recommended maximum hot water temperature setting for normal residential use is 120°F (49°C). Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

